

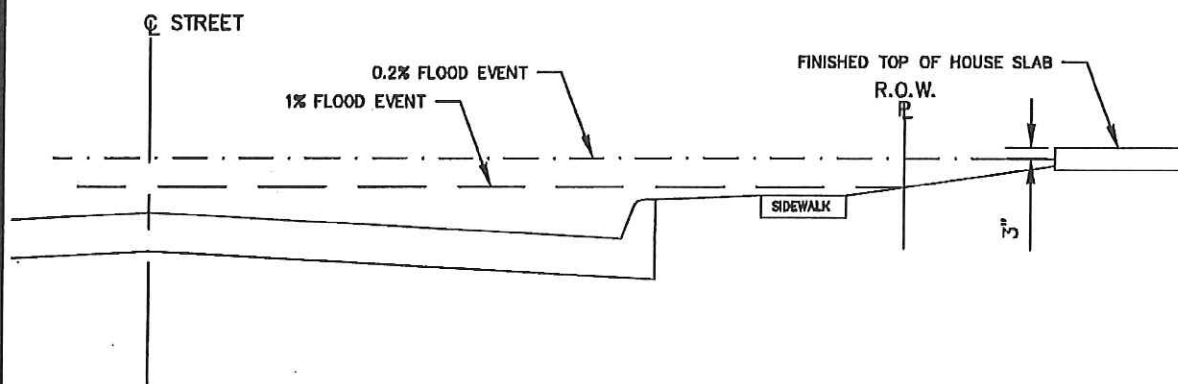
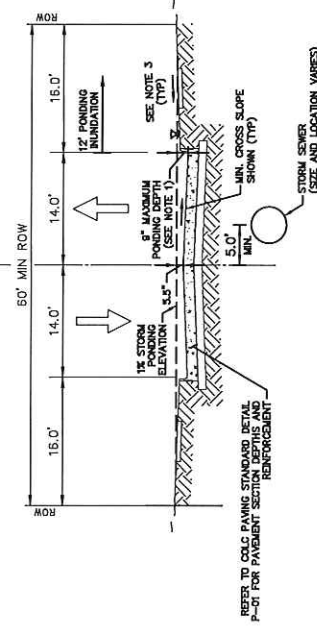


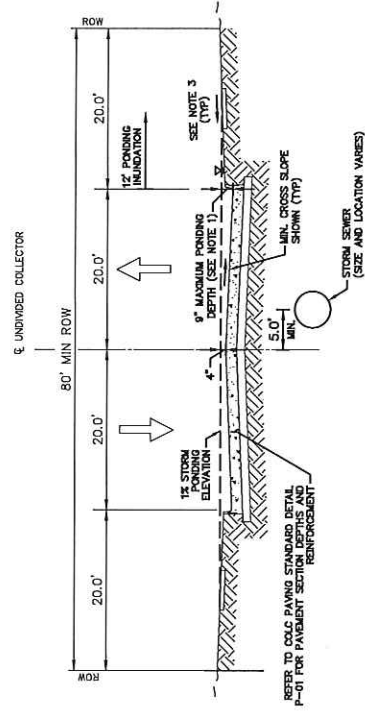


1% AND 0.2% FLOOD EVENT

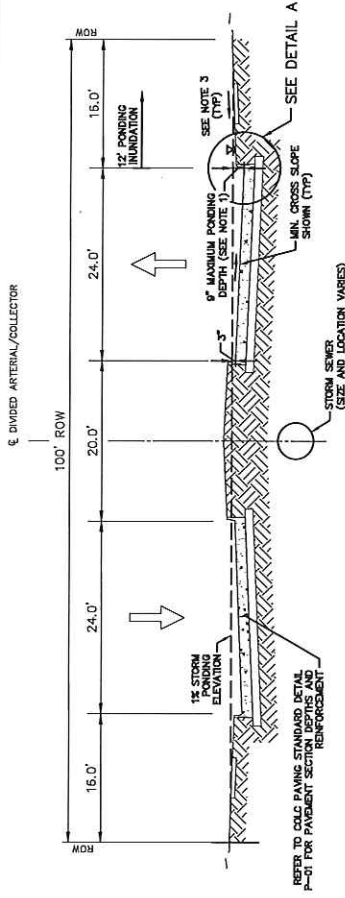

- NOTES:
1. THE STORM MAX PONDING DEPTH SHALL BE MEASURED AT THE ROADWAY LOW POINT FROM THE BOTTOM OF THE GUTTER.
 2. REFER TO GENERAL DESIGN STANDARDS AND CONSTRUCTION DETAILS FOR PAVEMENT CROSS SLOPE.
 3. MINIMUM PARKWAY SLOPE IS $\frac{1}{4}$ "/FT.
 4. ALL STORM RUNOFF SHALL BE CONVEYED IN THE RIGHT OF WAY.

DETAIL A



STW-04

Project No.	00000
Drawn	CHM
Scale	NTS
Sheet	1
Or	1
Check	MAS
Date	MAR 2018

DISCLAIMER: OF THE STANDARD IS COVERED BY THE "TEXAS ENGINEERING REGISTRY ACT", NO WARRANTY OF ANY KIND IS MADE BY COLC FOR ANY PURPOSES WHATSOEVER. COLC ASSUMES NO RESPONSIBILITY FOR THE DESIGN OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.