

ITB 26-038
Low Emissions Diesel Excavator

ITB 26-038 Cover Sheet
Due Date: Monday, June 8th, 2026 at 10:00 a.m.

Mustang Cat

Name of Firm/Company

Stuart Newton

Government Sales Rep

Agent's Name (Please Print)

Agent's Title

12800 Northwest Freeway

Houston

TX

77040

Mailing Address

City

State

Zip

713-460-2000

snewton@mustangcat.com

Telephone Number

Email Address

Stuart Newton

5/13/26

Authorized Signature

Date

Submission Checklist

Submission package shall consist of the following items.

- ☒ Cover Sheet
- ☒ Bid/Proposal (If hard copy submitted: one copy marked "original" and one copy marked "copy")
- ☒ Cost Sheet
- ☒ References
- ☒ Public Information Act Form
- ☒ HB 89 Verification Form
- ☒ Conflict of Interest Questionnaire (if required)

Certification and Addenda Acknowledgement

Agent must initial next to each addendum released to verify receipt:

Addendum #1 SN Addendum #2 _____ Addendum #3 _____

Addendum #4 _____ Addendum #5 _____ Addendum #6 _____

ITB 26-038
Low Emissions Diesel Excavator

ITB 26-038 Cost Sheet
Due Date: Monday, June 8th, 2026 at 10:00 a.m.

Unit prices listed below are good for ninety (90) calendar days after receipt of bid.

PROJECT COST PROPOSAL

Description		Item Total
1	HYDRAULIC EXCAVATOR	\$ 363,367.92
2	TCEQ-APPROVED GPS	\$ Included
3	TCEQ-APPROVED GPS INSTALLATION LABOR	\$ Included
4	FRIEGHT	\$ 3,200.00
5	WARRANTY:	\$ 3,009.00
6	LEAD/DELIVERY TIME	60 days

TOTAL COST ESTIMATE	\$ 369,576.92
--------------------------------	----------------------



INVITATION TO BID

ITB 26-038

Low Emissions Diesel Excavator

The City of League City is now accepting sealed bids for the Low Emissions Diesel **Excavator**. Sealed bids must be received by **10:00 a.m., CST, Monday, June 8th, 2026**. The clock located at the front desk in City Hall will be the official time. Bids received after this deadline will not be opened and will be considered void and unacceptable.

The question deadline for this bid is Wednesday, May 21st, 2026 at 5:30 pm and the final question addendum will be posted by Tuesday, May 28th, 2026 at 5:30 pm.

Bids will be publicly opened and read aloud immediately following the due date and time at City of League City Civic Center, 400 West Walker, League City, TX 77573.

The [complete ITB packet](https://www.leaguecitytx.gov/bids.aspx) (<https://www.leaguecitytx.gov/bids.aspx>) may be obtained from the City's website.

All inquiries about this ITB must be submitted in writing by [emailing the Purchasing Department](mailto:purchasing@leaguecitytx.gov) (purchasing@leaguecitytx.gov).

First Publication: May 7th, 2026

Second Publication: May 14th, 2026

ITB 26-038

Diesel Excavator

I. INTRODUCTION

The City of League City is now accepting sealed bids for a Low Emissions Diesel Excavator.

A. CLARIFICATION AND INTERPRETATION OF ITB

1. The words “must” or “will” or “shall” in this ITB indicate mandatory requirements. Taking exception to any mandatory requirements will be grounds for rejection of the bid.
2. The City desires to avoid any misunderstanding where it is assumed that a feature is included in the bid and turns out to be an optional, extra cost feature. As such, any question answered with an indication of compliance will be considered included at no additional cost. Any service that is referred to in the body of the response (does not pertain to attachments and brochures) will be considered included in the basic offer.

B. PURPOSE

The purpose of this ITB is to provide minimum requirements, solicit bids and gain adequate information from which the City may compare to the other providers and as they pertain to the needs of the City's organization as defined in this document.

C. CONFIDENTIAL OR PROPRIETARY INFORMATION

Upon Council award of contract or rejection of all Bids, contracting information, as defined by Texas Government Code 552 and in this document, shall be open for public inspection. Exceptions may be made if releasing the information would harm City interests by providing an advantage to a competitor or bidder in a future competitive situation, or if information requested contains trade secrets, or proprietary information.

Any information that the potential vendor or contractor believes may be considered proprietary, confidential or a trade secret should be stamped with the term CONFIDENTIAL on that part of the Bid. All Bids and parts of Bids which are not marked as confidential will be automatically considered public information after the contract is awarded. If the vendor, contractor, potential vendor, or potential contractor wishes to claim that information is proprietary, they must demonstrate based on specific factual evidence that disclosing the information would reveal an individual approach to work, organizational structure, staffing, internal operations, processes, or discounts, pricing methodology, cost data or other pricing information that will be used in future solicitation or bid documents; or give advantage to a competitor.

In the event that information contained in those sections marked confidential are included in an Open Records Request, the City will decline to release the information for the purpose of requesting an attorney general decision. The City will make a good faith effort to contact the vendor, so they may submit in writing to the attorney general the reasons why the information should be withheld or released. If the vendor cannot be contacted, the information may be released without further review. The process to be followed upon receipt of the request for information that potentially contains trade secrets, or proprietary or confidential information will be as follows:

1. City will make a good faith effort to notify the vendor in writing that the information has been requested no more than ten (10) business days after receiving the request. This will include a copy of the written request for information, and a statement that the vendor is entitled to submit to the attorney general with ten (10) business days the reason(s) why the information should be withheld and a letter, memorandum, or brief in support of that reason.
2. The vendor who submits a letter, memorandum, or brief to the attorney general shall send a copy to the person who requested the information from the governmental body. If the letter, memorandum or brief contains the substance of the information requested, the copy sent may be a redacted copy.
3. The attorney general shall promptly render a decision when requested, consistent with the standards of due process, determining whether the requested information requested contains trade secrets, or confidential or propriety information as defined in Texas Government code 552. The decision

shall be rendered no later than the 45th business day after the date the attorney general received the request for a decision.

DEFINED TERMS:

Contracting Information – information in a voucher or contract relating to the receipt of expenditure of public funds; solicitations or bid documents; communications sent between the City and a vendor, Bidder, potential vendor or potential Bidder during solicitation, evaluation, or negotiation of a contract; documents, including bid tabulations, showing the criteria by which a government body evaluates each vendor; and communications and other information sent between City and a vendor or Bidder related to the performance of a final contract with City or work performed on behalf of City.

Trade Secrets – all forms and types of information including business, scientific, technical, economic, or engineering information and any formula, design, prototype, pattern, plan, compilation, program device, program, code, device, method, technique process, procedure, financial data, or list of actual or potential customers or suppliers, whether tangible or intangible and whether or however stored, compiled, or memorialized physically, electronically, graphically, photographically, or in writing if the owner of the trade secret has taken reasonable measures under the circumstances to the information secret and the information derives independent economic value, actual or potential, from not being generally known to and not being readily ascertainable through proper means by, another person who can obtain economic value from the disclosure of the information.

D. BACKGROUND INFORMATION

League City is a home-rule, incorporated city with an estimated population of 123,910 for all city related business in calendar year 2025. The city encompasses approximately 52 square miles and is in the Houston metropolitan area. The city lies in northern Galveston County and southeast Harris County. League City is located approximately 26 miles southeast of downtown Houston and within 50 miles of Bush Intercontinental Airport. League City is experiencing rapid growth, adding approximately 3,000 residents a year. League City residents enjoy excellent schools, great parks, excellent public safety, recreational facilities, access to entertainment, an award-winning library, and a unique heritage. The City is governed by a Council/Manager form of government and municipal services are provided by 584 full-time equivalents. The City Council is an elected body consisting of the Mayor and seven Council Members. The City Manager, John Baumgartner, is responsible for all functions of city government. The organization is divided into functional departments and divisions reporting to the City Manager, and two (2) Assistant City Managers. The City is a CDBG entitlement community that receives federal funding from the Department of Housing and Urban Development.

II. INSTRUCTIONS TO BIDDERS

A. BID ACCEPTANCE

The City of League City reserves the right to accept or reject any and all bids, to accept any bids deemed advantageous and to waive irregularity in the bids. By bidding, the bidder acknowledges and will adhere to all bid specifications as stated within this bid packet. Only the services submitted and listed in this bid package and included in any addendums will be considered. The City reserves the right to disqualify bidders who attempt to alter or modify the instructions or specifications.

B. BID TIMELINE (Key Dates)

Invitation for Bids Issued: May 7th, 2026

Pre-Bid Meeting: N/A

Deadline for Submitting Questions: May 21st, 2026 at 5:30 p.m.

Bid Opening: June 8th, 2026 at 10:00 a.m.

Anticipated Contract Start Date: TBD

C. BID FORMAT

Bid submission packet shall consist of the following:

1. Completed and **SIGNED** Bid Cover Sheet (Attachment A)
2. Public Information Act (Attachment A)
3. Conflict of Interest Questionnaire (Attachment A)
4. HB 89 Form (Attachment A)
5. Bid Cost Sheet (Attachment A)
6. Bidder Certification & Addendum Acknowledgement (see Cover Sheet)
7. References

D. BID SUBMISSION

The City will receive bids electronically through Public Purchase or hard copies delivered to the Purchasing Department.

1. Public Purchase – Electronic Submission

Bids can be received electronically through www.publicpurchase.com. Instructions for Public Purchase can be found on Attachment C. Please be advised that it can take up to 24 hours for an account to be active with Public Purchase. If you need assistance with the process, you can [contact Public Purchase via email](mailto:support@publicpurchase.com) (support@publicpurchase.com). If bid bond is required, the bond must still be submitted as a hard copy.

2. Delivery or Mail – Hard Copies

Hard copy bids can be submitted with one (1) marked original and one (1) marked copy, properly labeled and clearly marked with the bid number and description. Hard copies should be delivered to:

City of League City Purchasing Department
City Hall
300 West Walker St.
League City, TX 77573
Monday – Thursday: 7:30 am to 5:30 pm
Friday: 7:30 am to 12:00 pm

Bids sent via courier must be sealed in a separate envelope inside of the mailer. Mark envelope/package:
26-038 Low Emissions Diesel Excavator

E. BID OPENING

Bids will be publicly opened and read aloud immediately following the due date and time. Bidders can attend in person at the address below.

League City Civic Center
400 West Walker St.
League City, TX 77573

Receipt of Bids and Sign-In Sheet will be uploaded to the City Website within 48 hours after bid opening.

F. BID AWARD

It is the intention of the City to award this bid to the lowest reasonable and responsible bidder. The City reserves the right to make a single award or multiple awards, whichever is in the best interest of the City to accomplish all services outlined in this bid. The City reserves the right to disqualify any bidder who attempts to alter or modify the specifications listed in the scope of work. It is the intent of the City to award a one time purchase.

G. REFERENCES

Bidder is to provide at least five (5) references, with at least two (2) from governmental agencies, for which you have provided this type of goods/services. Include the name of the agency, contact name,

telephone number, email address, date/length of the contract and a brief summary of work performed.

III. SCOPE OF WORK

A. INTRODUCTION

The City of League City seeks competitive bids for 26-038 Low Emissions Diesel Excavator. The purpose of these specifications is to describe the minimum requirements of the City of League City for the awarded contract. Bidders must be in full compliance with all local, state, and federal laws and policies related to the good/service provided.

B. SCOPE OF WORK

The City is soliciting bids for the purchase of one new excavator. This is a purchase-only solicitation; lease or lease-to-own options will not be considered.

1. Equipment Requirements

- The proposed excavator must be new and unused.
- The excavator shall have features and capabilities equal to or similar features as the City's existing excavator
- The engine model year must be no more than three calendar years older than the year of purchase
- The excavator must meet a nitrogen oxides (NOx) emissions rate of 0.3 or lower, in compliance with applicable standards.

2. TERP Grant Compliance

- Equipment and vendor must comply with all applicable TERP requirements and emissions standards.

3. GPS Requirement

- Vendor shall provide and install a TCEQ-approved GPS unit on the excavator
- GPS installation must be completed prior to delivery and be fully operational upon acceptance.

4. Delivery and Lead Time

- Vendor must clearly state anticipated lead time from award to delivery.
- Lead time will be considered as part of the evaluation and award determination.

5. Warranty Requirements

- Warranty shall remain in effect for five years or 3,000 operating hours, whichever occurs first on all parts and labor.
- Warranty terms shall include, at minimum:
 - Coverage period
 - Components included
 - Service response times

- Final warranty requirements may be subject to clarification by the City department prior to award.

6. Compliance and Documentation

- Vendor shall provide all necessary documentation demonstrating:
 - Compliance with emissions requirements
 - Equipment specifications
 - TERP eligibility (if applicable)
- Vendor must not be listed as debarred or suspended in the federal System for Award Management (SAM.gov) at the time of bid opening or award.

IV. PROCEDURE & CONDITIONS

A. General

This will be a contract, upon the mutual agreement of the parties. The terms, conditions, and requirements for the contract are to be evidenced in this Invitation to Bid (ITB) and incorporated into the City's standard agreement. A copy of the City's standard agreement, including its terms, is included in this ITB. The City, acting through the City Manager or their designee, reserves the right to deviate from the terms, conditions, or requirements of this ITB when, in their sole discretion, such deviation is deemed to be in the best interest of the City. Bidders acknowledge and accept that the City's authority includes discretion to determine the applicability of any deviations on a case-by-case basis and that such decisions are final and non-appealable. By submitting a bid, bidders agree to the terms of this reservation of rights and waive any claim against the City, its officials, or employees for the exercise of such discretion.

PROCEDURE :

MULTIPLE CONTRACTORS: The City reserves the right to make a single award or multiple awards, whichever is in the best interest of the City.

DOCUMENTATION: Bidders shall provide with their response all documentation required by this Invitation to Bid (ITB). Failure to provide this information may result in rejection of the bid.

QUANTITIES: The quantities indicated are estimated based upon the best available information. The City reserves the right to increase or decrease the quantities by any amount deemed necessary to meet its needs without any adjustments in the bid price.

TAX EXEMPTION: The City is not liable to bidders for any federal, state, or local taxes for which the City is not liable by law, including state and local sales and use taxes (Section 151.309 and Title 3, Texas Tax Code) and federal excise tax (Subtitle D of the Internal Revenue Code). Accordingly, those taxes may not be added to any item. The City's Tax Exemption Certificate will be furnished by the City on request of the bidder.

DISCUSSIONS: Formal or informal communication involving an oral or written exchange of information for the primary purpose of obtaining information essential for determining the acceptability of a bid may occur. Any discussions of this nature are only intended to clarify the City's understanding of submissions.

EVALUATION PROCESS: After receipt of the bids, City of League City will evaluate the bids based upon the evaluation criteria set forth in the ITB. It is the City's intent to enter into a contract with the lowest priced bidder(s) or the bidder(s) that offer the "best value" to the City. The City reserves the right to award a contract(s) on the basis of the low bid for each item or the total low bid. In the alternative, the City reserves the right to reject any and all bids.

COSTS TO SUBMIT: The City of League City will not be liable for any costs incurred by any bidder in

preparation of a submittal in response to this ITB, in conduct of a presentation, or any other activities related to the response of this ITB.

INSURANCE REQUIREMENTS: Bidder shall maintain, at their sole cost, at all times while performing work hereunder, the insurance and bond coverage set forth in the contract with companies satisfactory to the City with full policy limits applying, but not less than stated. A certificate evidencing the required insurance and specifically citing the indemnification provision set forth in the contract shall be delivered to the City within fifteen (15) days that Notice to Proceed has been accepted by bidder.

ADDENDA: Any interpretations, corrections or changes to this ITB and specifications will be made by addenda. The sole issuing authority of such addenda shall be the City of League City Purchasing Department. Any changes to specifications will be made in writing and posted on the [City's bid website \(https://www.leaguecitytx.gov/Bids.aspx\)](https://www.leaguecitytx.gov/Bids.aspx). Once issued, an addenda becomes a part of the ITB documents. Bidders shall acknowledge receipt of all addenda on the Bidder Certification/Addenda Acknowledgement form found within Attachment A.

LATE SUBMISSIONS: Bids received by the City after the submission deadline will be considered void and unacceptable. City of League City is not responsible for lateness or non- delivery of mail, carrier, etc. The date/time stamp at the front desk at City Hall, 300 West Walker Street, League City, Texas, 77573 shall be the official time of receipt.

ALTERING SUBMISSIONS: Bids cannot be altered or amended after the submission deadline. Any alterations or amendments made before the opening time must be initialed by the signer of the bid, guaranteeing authenticity.

AWARD: The City has the right to award a contract upon the conditions, terms and specifications contained in a bid submitted to the City for a period of up to ninety (90) days following the date specified for the opening of bids.

Because the City is a governmental entity that must follow State and Federal laws and has an obligation to protect its taxpayers, the City requires that certain terms be included in the contract that result from this ITB. Your response to this ITB is an offer to contract with the City based on the terms, conditions, and specifications contained in this ITB. If any of the mandatory contract terms are unacceptable to you, please do not respond to this ITB.

PAYMENT PROVISIONS: The City's payments under the contract, including the time of payment and the payment of interest on overdue amounts, are subject to Chapter 2251, Texas Government Code.

CONTRACTUAL LIMITATIONS PERIOD: Any provision of the contract that establishes a limitations period that does not run against the City by law or that is shorter than two (2) years is void. (Sections 16.061 and 16.070, Texas Civil Practice and Remedies Code).

CONFLICT OF INTEREST: No public official shall have interest in this contract accept in accordance with Vernon's Texas Codes Annotated, Local Government Code Title 5, Subtitle C, Chapter 171.

ETHICS: The bidder shall not offer or accept gifts or anything of value or enter into any business arrangement with any employee, official or agent of City of League City. More than one bid on any one contract from a bidder or individual under different names shall be grounds for rejection of all bids in which the bidder or individual has an interest. One or all bids will be rejected if there is any reason to believe that collusion exists between bidders. Bidders must make every effort to comply Chapter 176 of the Texas Local Government Code. Chapter 176 mandates the public disclosure of certain information concerning persons doing business or seeking to do business with the City of League City, including affiliations and business and financial relationships such persons may have with City of League City officers. By doing business or seeking to do business with the City of League City, including submitting a response to this ITB, you acknowledge that you have been notified of the requirements of Chapter 176 of the Texas Local Government Code and you are representing that you are in compliance with them.

Conflict of Interest Questionnaire found within Attachment A must be completed and turned in with each bid.

PURCHASE ORDER: City of League City may generate a purchase order to the successful bidder. The purchase order number must appear on all invoices, packing lists and all related correspondence. City of League City will not be responsible for any orders placed and/or delivered without a valid purchase order number.

DELIVERY: Any delivery and freight charges (FOB City of League City designated location) are to be included in the bid price.

INVOICES: Invoices must be itemized, and purchase order number must be referenced on original invoice. Any invoice, which cannot be verified by the contract price and/or is otherwise incorrect, will be

returned to the bidder for correction. Invoices submitted for payment shall be e-mailed to: City of League City, Accounts Payable (accountspayable@leaguecitytx.gov). Invoices can be mailed to Attn: Accounts Payable, to the address: 300 W. Walker St., League City, TX 77573. Periodic payments will be made within thirty (30) days of invoice date or satisfactory delivery of the product or service, whichever is later, provided that all other requirements as detailed in the contract have been fulfilled.

INTERLOCAL AGREEMENT: Chapter 791, Texas Government Code and Chapter 271, Subchapter F, Texas Local Government Code, authorizes cities to enter into Interlocal purchasing agreements to take advantage of potential cost savings resulting from cooperative purchasing efforts. Successful bidder(s) agree(s) to extend prices and terms to all entities, who have entered into or will enter into joint Purchasing Interlocal Cooperation Agreements with the City of League City.

CONTINGENCIES: Before submitting their bid, bidders should make a careful examination of the scope of work and of the difficulties involved in its proper execution. Bidders should include in their bid all costs they deem proper and sufficient to cover all contingencies essential to the completion of the compensation and classification study, notwithstanding that every item or contingency is not specifically mentioned herein.

CERTIFICATE OF INTERESTED PARTIES: Applies to all contracts that must be approved by the City Council. In accordance with House Bill 1295, for certain contracts entered into on or after January 1, 2016, the successful bidder must submit a Certificate of Interested Parties (Form 1295) at the time the signed contract is submitted to the City. This applies to any contract of any amount that must be approved by the City Council. Form 1295 must be filed electronically with the Texas Ethics Commission using the [online filing application](https://prd.tecprd.ethicsefile.com/TECCertInt/pages/login/certLogin.jsf) (<https://prd.tecprd.ethicsefile.com/TECCertInt/pages/login/certLogin.jsf>)

RENEWALS: Renewal options executed under this ITB may occur only if: (1) a renewal option is expressly referenced in this ITB and (2) upon the execution of a new written agreement signed by both parties. A renewal is intended to serve as an extension of the original agreement, under the same or substantially similar terms. The inclusion of a renewal option in this ITB shall not be construed as a commitment or obligation by either party to enter into a renewal. As such, the City retains the right, in its sole discretion, to accept or reject any proposed renewal or associated renewal terms.

HYDRAULIC EXCAVATORS

BID SPECIFICATION FOR LONG-BOOM HYDRAULIC EXCAVATOR

BASIC SPECIFICATIONS

- Y X N___ Engine net power according to ISO 14396 shall be at least 202 hp (151 kW).
- Y X N___ Lift capacity over the front at ground level, 31" (790 mm) track, 16,310 lb (6.7 mt) counterweight, 33' 6" (10.2 m) SLR Reach Boom, and 25' 9" (7.85 m) stick: 20' (6 m) shall no be less than 16,310 lb. (6700 kg). 25' (7.5 m) shall be no less than 11,000 lb. (5100 kg).
- Y X N___ Lift capacity over the side at ground level, 31" (790 mm) track, 16,310 lb (6.7 mt) counterweight, 33' 6" (10.2 m) SLR Reach Boom, and 25' 9" (7.85 m) stick: 20' (6 m) shall no be less than 13,050 lb. (6050 kg). 25' (7.5 m) shall be no less than 9,850 lb. (4600 kg).
- Y X N___ Maximum digging depth with 33' 6" (10.2 m) SLR Reach Boom, 25' 9" (7.85 m) stick shall not be less then 47' 10" (14,580mm).
- Y X N___ Maximum reach at ground level with 33' 6" (10.2 m) SLR Reach Boom, 25' 9" (7.85 m) stick shall not be less then 60' 0" (18,280).
- Y X N___ Operating weight with 33' 6" (10.2 m) SLR Reach Boom, 25' 9" (7.85 m) stick, 31" (790 mm) track, 16,310 lb (7,400 kg) counterweight, and 0.75 yd³ (30.57 m³) Ditch Cleaning bucket, bucket shall be at least 64,300 lb (29,200 kg).
- Y X N___ Shipping height with 33' 6" (10.2 m) SLR Reach Boom, and 25' 9" (7.85 m) stick shall be no greater than 10' 7" (3230 mm).
- Y X N___ Shipping length with 33' 6" (10.2 m) SLR Reach Boom, and 25' 9" (7.85 m) stick shall be no greater than 47' 1" (14,350 mm).
- Y X N___ Tail swing radius shall be 9' 10" (3000 mm).
- Y X N___ Ground clearance shall be 1' 5" (440 mm).
- Y X N___ Transport width shall be 11' 1" (3380 mm) with 31" (790 mm) shoes.
- Y X N___ Handrail height shall be 9' 10" (3000 mm).

ENGINE

- Y X N___ Engine shall meet US EPA Tier 4 Final, EU Stage IV, and Japan MLIT 2014 emission requirements.
- Y X N___ Engine must have an U.S. EPA tier 4 Final engine emission system featuring an aftertreatment regeneration solution that ensures the machine works as normal with no operator intervention needed. The regeneration process automatically starts once the filtering system detects soot buildup with no interruption to machine performance or the work process.
- Y X N___ Engine shall include three selectable power modes: Power Mode, **Smart Mode** or Economy Mode.
- Y X N___ Engine shall have a standard electric fuel priming pump eliminating the need for you to manually prime after filter changes and also eliminates the risk of fuel contamination.
- Y X N___ Engine shall include bio diesel-ready high-pressure common rail fuel system and allow the use of bio fuel up to B20 (bio fuel 20% mixture).
- Y X N___ Engine can run on either ultra-low-sulfur diesel (ULSD) fuel with 15 ppm of sulfur or biodiesel
- Y X N___ **Machine shall be equipped with 8 individual on-demand electronically-driven fans, with reversing capability standard**

- The cooling system shall be capable of maintaining proper cooling in ambient conditions up to 125°F (52°C).
- Y X N ___ Cooling fan shall automatically adjust to ambient temperature to help reduce fuel consumption and noise.
- Y X N ___ The two-stage cartridge air filter system, including both a primary and secondary replaceable filter element and shall be located in a compartment behind the cab. A warning shall be displayed on the monitor when dust accumulated above a preset level.
- Y X N ___ **Machine shall be equipped with an air precleaner system integrated into air filter housing cover**
- Y X N ___ Engine mounts shall be rubber-isolating.
- Y X N ___ Engine bore shall be 4" (105 mm) and stroke shall be 5.0" (135 mm).
- Y X N ___ Engine displacement shall be 428 cubic inches (7 L).
- Y X N ___ Machine shall have One-touch low idle lets you reduce engine speed when the machine isn't working
- Y X N ___ Machine shall have engine idle shut down in which will shut down the machine after an adjustable predetermined amount of time. This can be enabled by service tech or Cat ET and allows for productivity/sustainability/efficiency during unnecessary idle time
- Y X N ___ To reduce fuel consumption, the machine shall be equipped with an Automatic Engine Speed Control system that reduces engine speed if a no load or light load condition is detected for more than 3 seconds. The system shall also have a second stage activated by a cab switch, which reduces engine speed significantly further (almost to low idle) under the same conditions.
- Y X N ___ Fuel tank must have a standard overfill indicator which rises when the fuel tank is full to help service personnel avoid spilling.

POWERTRAIN/TRANSMISSION

- Y X N ___ Maximum travel speed shall be at least 3.5 mph (5.7 km/h).
- Y X N ___ Maximum drawbar pull shall be at least 50,807 lbf (226 kN).

TECHNOLOGY

- Y X N ___ **Machine shall be equipped with configurable joystick control buttons that can be assigned and stored to control different machine functions based on operator preference**
- Y X N ___ **Machine shall be equipped with 2D GRADE or equivalent 2D grade depth and slope reference system**
- Y X N ___ **Machine shall be equipped with GRADE Assist or equivalent semi-autonomous grade system**
- Y X N ___ **Machine shall be equipped with Cat Payload Measurement or equivalent on-board payload system**
- Y X N ___ **Machine shall be equipped with E-Wall Ceiling or equivalent operator-defined semi-autonomous zone avoidance system**
- Y X N ___ **Machine shall be equipped with E-Wall Floor or equivalent operator-defined semi-autonomous zone avoidance system**
- Y X N ___ **Machine shall be equipped with E-Wall Forward or equivalent operator-defined semi-autonomous zone avoidance system**
- Y X N ___ **Machine shall be equipped with E-Wall Swing or equivalent operator-defined semi-autonomous zone avoidance system**
- Y X N ___ **Machine shall be equipped with E-Wall Cab Protection or equivalent operator-defined semi-autonomous zone avoidance system**

- Y X N___ Machine shall be available with optional 2D GRADE Advanced or equivalent 2D grade system with in-field design capability through use of additional monitor
- Y X N___ Machine shall be available with optional 3D GRADE or equivalent 3D GPS grade system
- Y X N___ Machine shall be equipped with Secure Start system that limits and tracks machine access using individual operator codes entered through touchscreen display
- Y X N___ Machine shall be equipped with Secure Start system available to use with optional key fob and mobile phone application
- Y X N___ Machine shall be equipped with Operator Identification which stores customized individual operator machine preferences

HYDRAULIC SYSTEM

- Y X N___ Main system shall have a maximum flow of 136 gal/min (515 L/min) with two pumps.
- Y X N___ Maximum pressure shall be at least 5,075 psi (35 000 kPa) under normal pressure and at least 5,510 psi (38 000 kPa) under heavy lift pressure.
- Y X N___ Maximum pressure for the travel circuit shall be at least 5,075 psi (35 000 kPa).
- Y X N___ Maximum pressure for the swing circuit shall be at least 4,118 psi (28 400 kPa).
- Y X N___ An electric boom regeneration valve and a stick regeneration circuit shall save energy during boom-down and stick-in operations to increase efficiency.
- Y X N___ **Machine shall have electro-hydraulically controlled main valve for all implement functions**
- Y X N___ Hydraulic cylinder snubbers shall be located at the rod-end of the boom cylinders and both ends of the stick cylinders to cushion shocks and reducing sound levels.
- Y X N___ Machine shall have automatic 2 speed travel

UNDERCARRIAGE

- Y X N___ Undercarriage length shall be at least 15' 3" (4640 mm).
- Y X N___ Undercarriage width shall be at least 10' 6" (3190 mm).
- Y X N___ Machine shall have Cat Grease Lubricated Track 2 (GLT2) track links providing protection between moving parts

OPERATORS STATION

- Y X N___ Machine shall have sound suppressed ROPS cab (ISO 12117-2 compliant) with viscous mounting
- Y X N___ Machine shall be prewired for a system to assist with fleet management and track hours, location, security and product health.
- Y X N___ Machine shall have High back seat w/ heater and air suspension
- Y X N___ Seat shall have reclining back, upper and lower seat slide adjustments, height and tilt adjustments, adjustable armrests, and a high visibility colored retractable seat belt.
- Y X N___ **Machine shall have two position tiltable left-hand joystick console to aid ingress/egress**
- Y X N___ Monitor shall include a minimum 10-inch color LCD touchscreen capable of displaying up to two different camera images on the screen w/ distortion-free rearview camera picture.
- Y X N___ **Machine shall be equipped with push-button start ignition**
- Y X N___ **Machine shall be equipped with a jog dial located on right-hand console to allow operator to scroll through monitor menu functions**

- Y X N___ Monitor shall be programmable to display messages or warnings in choice of 42 different languages in text form instead of codes.
- Y X N___ A rearview camera housed in the counterweight and displayed through the cab monitor shall be offered standard
- Y X N___ Machine shall have a standard joystick control pattern changer selectable through touchscreen monitor
- Y X N___ Machine shall have a third pedal for straight travel
- Y X N___ Monitor shall perform pre-start fluid level checks.
- Y X N___ Monitor shall have a programmable service interval reminder for timely maintenance.
- Y X N___ An engine shutdown setting shall be accessible through the monitor to allow owners and operators to specify idle time before engine shutdown to conserve fuel.
- Y X N___ The cab shell shall be attached to the frame with viscous rubber cab mounts to dampen vibrations and sound levels.
- Y X N___ All glass shall be affixed directly to the cab and eliminate window frames for enhanced visibility.
- Y X N___ The upper front windshield shall open, close and store on the roof above the operator with an assist device.
- Y X N___ A skylight with sunshade shall provide visibility and ventilation.
- Y X N___ The hydraulic system shall provide automatic priority function for boom- up and swing operations based on operator demand and eliminating the need for work mode buttons.
- Y X N___ Machine shall utilize **electro-hydraulic operated control levers** positioned so the operator can operate with arms on the armrests.
- Y X N___ Machine shall have ground level accessible secondary engine shutoff switch in cab

STICK AND BOOM

- Y X N___ Machine shall have 33' 6" (10.2 m) SLR Reach Boom
- Y X N___ Bucket linkage pins shall have thick chrome plating.
- Y X N___ Boom and stick built with Large box-section structures with thick, multiple-plate fabrications. These structures shall have castings/forgings designed into the high stress areas like the boom nose, boom foot, and boom/stick cylinders to enhance durability.
- Y X N___ Machine shall have 25' 9" (7.85 m) stick

SWING SYSTEM

- Y X N___ Swing torque shall be at least 78,180 lb. ft (106 kN*m).
- Y X N___ Swing speed shall be 10.5 rpm.

WORK TOOL OPTIONS

- Y X N___ Machine manufacturer shall manufacture their own buckets and a wide variety of other work tools to insure proper machine/application match.

SERVICEABILITY

- Y X N___ Machine shall have sealed and lubricated track rollers, carrier rollers, and idlers.
- Y X N___ Service points shall be centrally located with easy access to facilitate routine maintenance.
- Y X N___ Machine shall be equipped with SOS sampling ports and hydraulic test ports for the hydraulic system, engine oil and for coolant.
- Y X N___ A concentrated remote greasing block on the boom shall deliver grease to hard to reach locations.

- Y X N Machine shall be equipped grouped service points allowing all daily maintenance checks to be performed from ground level
- Y X N Machine shall be equipped with engine oil level dipstick located in the pump compartment, accessible from ground level
- Y X N Machine shall be equipped with an automatic electric fuel priming pump mounted to the primary filter base for greater reliability and easier service compared to traditional hand-priming pumps.
- Y X N Machine shall be equipped with a fuel tank overfill indicator that rises when the tank is full and visible from ground level.
- Y X N The left rear service door shall allow easy access to the engine radiator, oil cooler and air-to-air after-cooler.
- Y X N The fuel tank shall feature a remote drain cock located in the pump compartment for easy water and sediment removal.
- Y X N A coolant reserve tank shall be located in a position above the inlet and outlet of the engine radiator.

MINIMUM SERVICE FILL CAPACITIES

- Y X N Fuel tank capacity shall not be less than 125.2 gal (474 L).
- Y X N Cooling system capacity shall not be less than 6.6 gal (25 L).
- Y X N Engine oil capacity shall not be less than 6.6 gal (25 L).
- Y X N Swing drive capacity shall not be less than 2.6 gal (10 L).
- Y X N Each final drive shall have a capacity of not less than 1.5 gal (5.5 L).
- Y X N Hydraulic system (including tank) refill capacity shall be no less than 81.9 gal (310 L).
- Y X N DEF tank refill capacity shall be no less than 10.8 gal (41 L).

OWNING AND OPERATING COSTS

- Y X N Grease lubricated track shall reduce dirt entry to the pin and bushing joint and provide longer wear life.
- Y X N Front linkage shall have a recommended maintenance interval of 500 hours.
- Y X N Bucket linkage shall have a recommended maintenance interval of 100 hours.
- Y X N Engine oil/filter shall have a recommended maintenance interval of 500 hours.
- Y X N **Hydraulic oil return filter shall have a recommended maintenance interval of 3,000 hours.**

ADDITIONAL FEATURES

- Y X N Machine shall be prewired for a system to assist with fleet management and track hours, location, security and product health.
- Y X N Machine shall have standard a rearview and **right-hand camera** with three mirrors and one additional cab mirror
- Y X N **A 360-degree camera system visible on primary machine display shall be available as an option**
- Y X N Machine shall have standard bolt free service platform with anti-skid plate
- Y X N Machine shall be equipped with **centrally located steps perpendicular to trackframe** allowing three points of contact to the service platform



326

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	2
Standards	3
Sound Performance	3
Operating Weights and Ground Pressures	3
Major Component Weights	4
Dimensions	5
Working Ranges and Forces	7
Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb)	9
SLR Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb)	12
Bucket Specifications and Compatibility	18
Attachments Offering Guide	21
Thumb Specifications	31
Standard and Optional Equipment	32
Dealer Installed Kits and Attachments	34
326 Environmental Declaration	35

326 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C7.1	
Net Power		
ISO 9249	149.8 kW	201 hp
ISO 9249 (DIN)	204 hp (metric)	
Engine Power		
ISO 14396	151 kW	202 hp
ISO 14396 (DIN)	205 hp (metric)	
Bore	105 mm	4 in
Stroke	135 mm	5 in
Displacement	7.01 L	428 in ³
Biodiesel capability	Up to B20 ⁽¹⁾	

- Meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system, and alternator.
- Engine speed at 2,200 rpm.

⁽¹⁾Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:

- ✓ 20% biodiesel FAME (fatty acid methyl ester)*
- ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).*

***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

Swing Mechanism

Swing Speed	9.9 rpm	
Maximum Swing Torque	106 kN·m	78,180 lbf·ft

Weights

Operating Weight	26 300 kg	57,900 lb
• Long undercarriage, Reach boom, R2.95 m (9'7") stick, 1.54 m³ (2.01 yd³) Heavy Duty (HD) bucket, 790 mm (31") triple grouser shoes and 4600 kg (10,140 lb) counterweight.		
Operating Weight	29 700 kg	65,400 lb
• Long undercarriage, Super Long Reach boom, SLR 7.85A (25'9") stick, 0.57 m³ (0.75 yd³) Ditch Cleaning (DC) bucket, 790 mm (31") triple grouser shoes and 7400 kg (16,310 lb) counterweight.		

Track

Standard Track Shoes Width	790 mm	31 in
Optional Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	700 mm	28 in
Number of Shoes (each side)	51	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Gradeability	35°/70%	
Maximum Travel Speed	5.6 km/h	3.5 mph
Maximum Drawbar Pull	228 kN	51,256 lbf

Hydraulic System

Main System – Maximum Flow – Implement	481 L/min (241 × 2 pumps)	127 gal/min (64 × 2 pumps)
Maximum Pressure – Equipment – Normal	35 000 kPa	5,075 psi
Maximum Pressure – Heavy Lift Mode/Auto Dig Boost	38 000 kPa	5,510 psi
Maximum Pressure – Travel	35 000 kPa	5,075 psi
Maximum Pressure – Swing	28 400 kPa	4,118 psi
Auxiliary Pump (optional) – Maximum Flow	56 L/min	15 gal/min
Auxiliary Pump (optional) – Maximum Pressure	14 000 kPa	2,031 psi
Boom Cylinder – Bore	135 mm	5 in
Boom Cylinder – Stroke	1305 mm	51 in
Stick Cylinder – Bore	140 mm	6 in
Stick Cylinder – Stroke	1660 mm	65 in
Bucket Cylinder – Bore	130 mm	5 in
Bucket Cylinder – Stroke	1156 mm	46 in

Service Refill Capacities

Fuel Tank Capacity	474 L	125.2 gal
Cooling System	25 L	6.6 gal
Engine Oil (with filter)	25 L	6.6 gal
Swing Drive	11.5 L	3.0 gal
Final Drive (each)	4.5 L	1.2 gal
Hydraulic System (including tank)	310 L	81.9 gal
Hydraulic Tank	147 L	38.8 gal
Diesel Exhaust Fluid (DEF) Tank	41 L	10.8 gal

326 Hydraulic Excavator Specifications

Standards

Brakes	ISO 10265:2008
Cab/Operator Protective Guards (OPG) (optional)	ISO 10262:1998 Level II
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008

Sound Performance

ISO 6395:2008 (external)	103 dB(A)
ISO 6396:2008 (inside cab)	70 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Operating Weights and Ground Pressures

	600 mm (24") Single Grouser Shoes		700 mm (28") Triple Grouser Shoes		790 mm (31") Triple Grouser Shoes	
	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure
	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
Base Machine with 4600 kg (10,140 lb) Counterweight and Long Undercarriage						
Reach Boom + R2.95CB1 (9'8") Stick + 1.54 m ³ (2.01 yd ³) HD Bucket	25 600 (56,300)	51 (7.4)	26 000 (57,200)	44 (6.4)	26 300 (57,900)	40 (5.8)
Reach Boom + R3.6CB1 (11'10") Stick + 1.54 m ³ (2.01 yd ³) HD Bucket	25 800 (56,700)	51 (7.4)	26 200 (57,600)	45 (6.5)	26 500 (58,300)	40 (5.8)
Base Machine with 7400 kg (16,310 lb) Counterweight and Long Undercarriage						
Super Long Reach Boom + SLR 7.85A (25'9") Stick + 0.57 m ³ (0.75 yd ³) DC Bucket	29 000 (63,800)	58 (8.4)	29 400 (64,700)	50 (7.3)	29 700 (65,400)	45 (6.5)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

326 Hydraulic Excavator Specifications


Major Component Weights

	kg	lb
Base Machine Weight (including counterweight, upper frame, undercarriage and two boom cylinders – does not include boom, stick, bucket, stick cylinder, bucket cylinders, tracks, 90% fuel tank and 75 kg [165 lb] operator).		
With 4600 kg (10,140 lb) Counterweight and Long Undercarriage	17 250	38,010
With 7400 kg (16,310 lb) Counterweight and Long Undercarriage	19 980	44,040
Track Shoes:		
600 mm (24") Width, 14 mm (0.55") Thick, Single Grouser Track Shoes	3260	7,170
700 mm (28") Width, 12.5 mm (0.49") Thick, Triple Grouser Track Shoes	3670	8,080
790 mm (31") Width, 12.5 mm (0.49") Thick, Triple Grouser Track Shoes with Step Extension	4000	8,810
Two Boom Cylinders	460	1,010
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	470	1,020
Counterweights:		
4600 kg (10,140 lb) Counterweight	4600	10,140
7400 kg (16,310 lb) Counterweight	7400	16,310
Undercarriage:		
Long Undercarriage	5020	11,070
Booms (including lines, pins, stick cylinder):		
Reach Boom 5.9 m (19'4")	2050	4,520
Super Long Reach (SLR) Boom 10.2 m (33'6")	3190	7,020
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick R2.95CB1 (9'8")	1310	2,870
Reach Stick R3.6CB1 (11'10")	1500	3,310
Super Long Reach Stick 7.85 (25'9")	1640	3,610
HP, MP, QC lines for Reach Stick R2.95CB1 (9'8")	90	190
Buckets (without linkage, with tips and side cutters):		
1.54 m ³ (2.01 yd ³) HD CB Linkage	1200	2,630
1.76 m ³ (2.30 yd ³) HD CB Linkage	1290	2,840
0.57 m ³ (0.75 yd ³) DC A Linkage	390	850
0.74 m ³ (0.97 yd ³) General Duty (GD) A Linkage	460	1,010
Quick Couplers:		
Pin Grabber Quick Coupler with Pins	530	2,650
Pin Grabber Quick Coupler without Pins	500	2,430

326 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

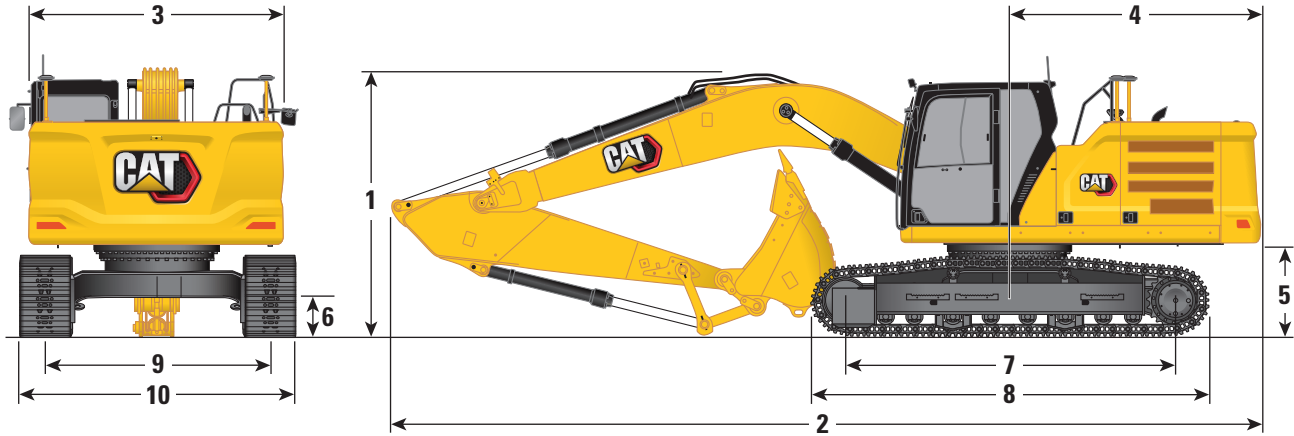

Boom Options

Reach Boom
5.9 m (19'4")

Stick Options

Reach Stick


	R2.95CB (9'8")		R3.6CB (11'10")	
1 Machine Height:				
Top of Cab Height	3000 mm	9'10"	3000 mm	9'10"
Top of GNSS Antenna Height (if installed)	3030 mm	9'11"	3030 mm	9'11"
Top of OPG Height	3140 mm	10'4"	3140 mm	10'4"
Handrail Height	3000 mm	9'10"	3000 mm	9'10"
With Boom/Stick/Bucket Installed	3250 mm	10'8"	3520 mm	11'7"
With Boom/Stick Installed	3120 mm	10'3"	3310 mm	10'10"
With Boom Installed	3000 mm	9'10"	3000 mm	9'10"
2 Machine Length:				
With Boom/Stick/Bucket Installed	10 060 mm	33'0"	10 060 mm	33'0"
With Boom/Stick Installed	10 040 mm	32'11"	10 060 mm	33'0"
With Boom Installed	8720 mm	28'7"	8720 mm	28'7"
3 Upperframe Width	2940 mm	9'8"	2940 mm	9'8"
4 Tail Swing Radius	3000 mm	9'10"	3000 mm	9'10"
5 Counterweight Clearance	1060 mm	3'6"	1060 mm	3'6"
6 Ground Clearance	440 mm	1'5"	440 mm	1'5"
7 Track Length – Length to Center of Rollers	3830 mm	12'7"	3830 mm	12'7"
8 Track Length – Crawler Overall Length	4640 mm	15'3"	4640 mm	15'3"
9 Track Gauge	2590 mm	8'6"	2590 mm	8'6"
10 Undercarriage Width:				
with 600 mm (24") Shoes	3190 mm	10'6"	3190 mm	10'6"
with 700 mm (28") Shoes	3290 mm	10'10"	3290 mm	10'10"
with 790 mm (31") Shoes with Steps	3380 mm	11'1"	3380 mm	11'1"
Bucket Type	HD		HD	
Bucket Capacity	1.54 m ³	2.01 yd ³	1.54 m ³	2.01 yd ³
Bucket Tip Radius	1660 mm	5'5"	1660 mm	5'5"

(continued on next page)

326 Hydraulic Excavator Specifications

Dimensions *(continued)*

All dimensions are approximate and may vary depending on bucket selection.

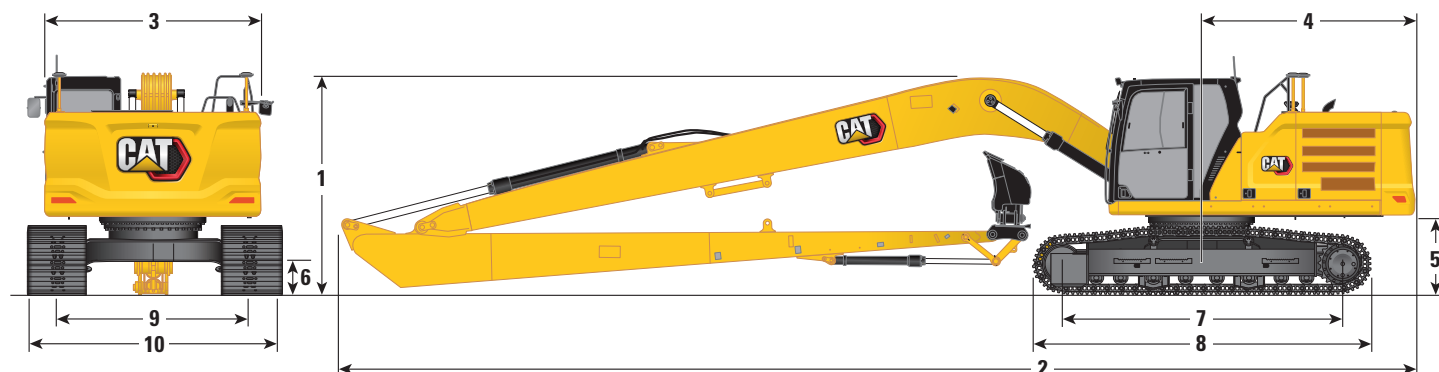

Boom Options

SLR Boom
10.2 m (33'6")

Stick Options

SLR Stick
7.85A (25'9")

1 Machine Height:

Top of Cab Height	3000 mm	9'10"
Top of GNSS Antenna Height (if installed)	3030 mm	9'11"
Top of OPG Height	3140 mm	10'4"
Handrail Height	3000 mm	9'10"
With Boom/Stick/Bucket Installed	3160 mm	10'4"
With Boom/Stick Installed	3160 mm	10'4"
With Boom Installed	3000 mm	9'10"

2 Machine Length:

With Boom/Stick/Bucket Installed	14 350 mm	47'1"
With Boom/Stick Installed	14 350 mm	47'1"
With Boom Installed	13 250 mm	43'6"

3 Upperframe Width

2940 mm 9'8"

4 Tail Swing Radius

3000 mm 9'10"

5 Counterweight Clearance

1060 mm 3'6"

6 Ground Clearance

440 mm 1'5"

7 Track Length – Length to Center of Rollers

3830 mm 12'7"

8 Track Length – Crawler Overall Length

4640 mm 15'3"

9 Track Gauge

2590 mm 8'6"

10 Undercarriage Width:

with 600 mm (24") Shoes	3190 mm	10'6"
with 700 mm (28") Shoes	3290 mm	10'10"
with 790 mm (31") Shoes with Steps	3380 mm	11'1"

Bucket Type

DC

Bucket Capacity

0.57 m³ 0.75 yd³


Bucket Tip Radius

1070 mm 3'6"

326 Hydraulic Excavator Specifications

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

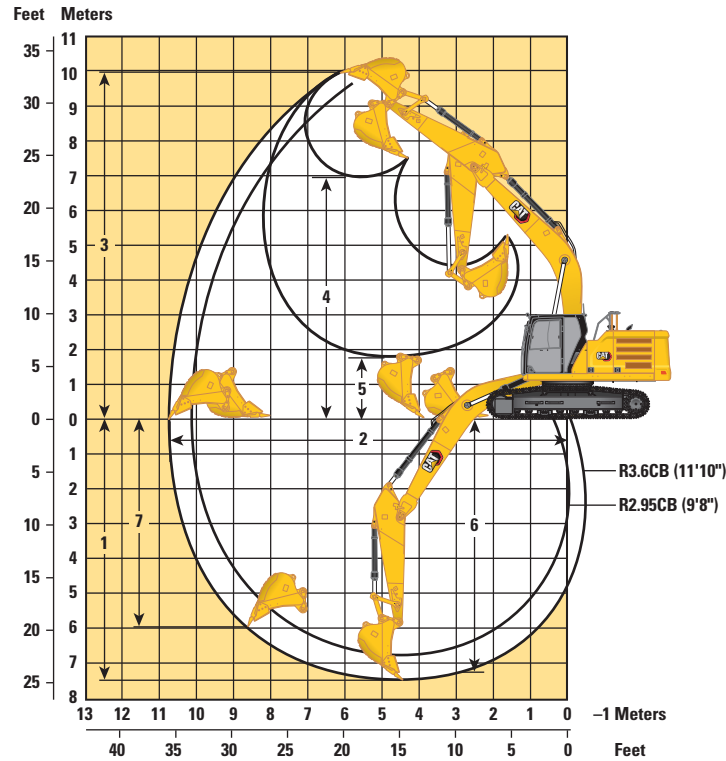

Boom Options

Reach Boom
5.9 m (19'4")

Stick Options

Reach Stick


	Reach Stick			
	R2.95CB (9'8")		R3.6CB (11'10")	
1 Maximum Digging Depth	6820 mm	22'5"	7470 mm	24'6"
2 Maximum Reach at Ground Line	10 120 mm	33'2"	10 730 mm	35'2"
3 Maximum Cutting Height	9680 mm	31'9"	9960 mm	32'8"
4 Maximum Loading Height	6610 mm	21'8"	6900 mm	22'8"
5 Minimum Loading Height	2390 mm	7'10"	1740 mm	5'9"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	6650 mm	21'10"	7330 mm	24'1"
7 Maximum Vertical Wall Digging Depth	5340 mm	17'6"	5960 mm	19'7"
Bucket Digging Force (ISO)	166 kN	37,320 lbf	166 kN	37,320 lbf
Stick Digging Force (ISO)	121 kN	27,200 lbf	105 kN	23,600 lbf
Bucket Digging Force (ISO) – Auto Dig Boost	180 kN	40,520 lbf	180 kN	40,520 lbf
Stick Digging Force (ISO) – Auto Dig Boost	131 kN	29,530 lbf	114 kN	25,630 lbf
Bucket Type	HD		HD	
Bucket Capacity	1.54 m ³	2.01 yd ³	1.54 m ³	2.01 yd ³
Bucket Tip Radius	1660 mm	5'5"	1660 mm	5'5"

(continued on next page)

326 Hydraulic Excavator Specifications

Working Ranges and Forces (continued)

All dimensions are approximate and may vary depending on bucket selection.

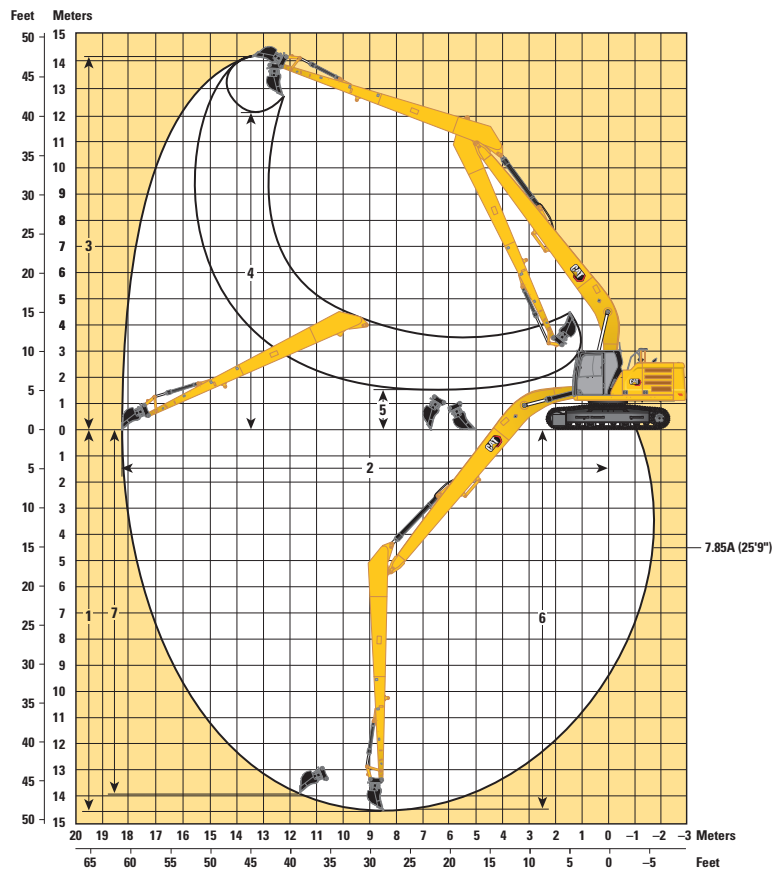

Boom Options

SLR Boom
10.2 m (33'6")




Stick Options

SLR Stick
7.85A (25'9")

1 Maximum Digging Depth	14 580 mm	47'10"
2 Maximum Reach at Ground Line	18 280 mm	60'0"
3 Maximum Cutting Height	14 210 mm	46'7"
4 Maximum Loading Height	12 150 mm	39'10"
5 Minimum Loading Height	1500 mm	4'11"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	14 480 mm	47'6"
7 Maximum Vertical Wall Digging Depth	13 980 mm	45'10"
Bucket Digging Force (ISO)	62 kN	13,830 lbf
Stick Digging Force (ISO)	45 kN	10,160 lbf
Bucket Type	DC	
Bucket Capacity	0.57 m ³	0.75 yd ³
Bucket Tip Radius	1070 mm	3'6"




326 Hydraulic Excavator Specifications


Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"				mm ft/in
												
7500 mm 25'0"	kg lb					*7100 *14,650	*7100 *14,650			*5900 *13,050	*5900 *13,050	6430 20'8"
6000 mm 20'0"	kg lb					*7250 *15,850	7200 15,400	*5650 5000		*5600 *12,350	5000 11,100	7510 24'5"
4500 mm 15'0"	kg lb			*9450 *20,350	*9450 *20,350	*8100 *17,550	6950 14,950	7300 15,650	4950 10,600	*5600 *12,300	4300 9,450	8180 26'9"
3000 mm 10'0"	kg lb			*12 100 *26,050	10 150 21,900	*9300 *20,150	6650 14,300	7150 15,350	4800 10,300	*5800 *12,750	3950 8,650	8540 27'11"
1500 mm 5'0"	kg lb			*14 450 *31,150	9550 20,600	9800 21,050	6350 13,700	7000 15,000	4650 10,000	5700 12,500	3800 8,350	8610 28'3"
0 mm 0'0"	kg lb			15 250 32,700	9250 19,900	9550 20,550	6150 13,250	6850 14,750	4550 9,750	5800 12,800	3850 8,500	8420 27'7"
-1500 mm -5'0"	kg lb	*11 350 *25,750	*11 350 *25,750	15 150 32,450	9150 19,700	9450 20,300	6050 13,050	6800 14,650	4500 9,650	6300 13,900	4150 9,200	7940 26'0"
-3000 mm -10'0"	kg lb	*18 550 *42,250	18 400 39,350	*14 350 *31,050	9250 19,850	9500 20,400	6100 13,100			7400 16,400	4850 10,800	7120 23'2"
-4500 mm -15'0"	kg lb	*16 000 *34,300	*16 000 *34,300	*11 750 *25,100	9450 20,350					*8750 *19,250	6600 14,850	5790 18'8"

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"				mm ft/in
												
7500 mm 25'0"	kg lb					*7100 *14,650	*7100 *14,650			*5900 *13,050	*5900 *13,050	6430 20'8"
6000 mm 20'0"	kg lb					*7250 *15,850	7100 15,250	*5650 4950		*5600 *12,350	4950 10,950	7510 24'5"
4500 mm 15'0"	kg lb			*9450 *20,350	*9450 *20,350	*8100 *17,550	6900 14,800	7200 15,500	4850 10,450	*5600 *12,300	4250 9,350	8180 26'9"
3000 mm 10'0"	kg lb			*12 100 *26,050	10 050 21,650	*9300 *20,150	6600 14,150	7050 15,150	4750 10,150	5800 *12,750	3900 8,550	8540 27'11"
1500 mm 5'0"	kg lb			*14 450 *31,150	9450 20,350	9650 20,800	6300 13,550	6900 14,850	4600 9,850	5600 12,350	3750 8,250	8610 28'3"
0 mm 0'0"	kg lb			15 100 32,300	9150 19,650	9450 20,300	6100 13,100	6800 14,550	4450 9,600	5750 12,650	3800 8,400	8420 27'7"
-1500 mm -5'0"	kg lb	*11 350 *25,750	*11 350 *25,750	15 000 32,050	9050 19,450	9350 20,050	6000 12,900	6750 14,500	4450 9,550	6200 13,700	4100 9,050	7940 26'0"
-3000 mm -10'0"	kg lb	*18 550 *42,250	18 200 38,900	*14 350 *31,050	9100 19,600	9350 20,150	6000 12,950			7300 16,200	4800 10,650	7120 23'2"
-4500 mm -15'0"	kg lb	*16 000 *34,300	*16 000 *34,300	*11 750 *25,100	9350 20,150					*8750 *19,250	6550 14,700	5790 18'8"



ISO 10567:2007





* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.


326 Hydraulic Excavator Specifications


Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"				mm ft/in
												
7500 mm 25'0"	kg lb					*7100 *14,650	7050 *14,650			*5900 *13,050	*5900 *13,050	6430 20'8"
6000 mm 20'0"	kg lb					*7250 *15,850	7000 15,050	*5650	4850	*5600 *12,350	4850 10,800	7510 24'5"
4500 mm 15'0"	kg lb			*9450 *20,350	*9450 *20,350	*8100 *17,550	6800 14,600	7100 15,250	4800 10,300	*5600 *12,300	4150 9,200	8180 26'9"
3000 mm 10'0"	kg lb			*12 100 *26,050	9900 21,400	*9300 *20,150	6500 13,950	6950 14,950	4650 10,000	5700 12,550	3850 8,400	8540 27'11"
1500 mm 5'0"	kg lb			*14 450 *31,150	9300 20,050	9500 20,450	6200 13,350	6800 14,600	4500 9,700	5550 12,150	3700 8,150	8610 28'3"
0 mm 0'0"	kg lb			14 850 31,800	9000 19,350	9300 19,950	6000 12,900	6650 14,350	4400 9,450	5650 12,450	3750 8,250	8420 27'7"
-1500 mm -5'0"	kg lb	*11 350 *25,750	*11 350 *25,750	14 750 31,600	8900 19,150	9200 19,750	5900 12,700	6600 14,250	4350 9,400	6100 13,500	4050 8,900	7940 26'0"
-3000 mm -10'0"	kg lb	*18 550 *42,250	17 950 38,350	*14 350 *31,050	9000 19,300	9200 19,850	5950 12,750			7200 15,950	4750 10,500	7120 23'2"
-4500 mm -15'0"	kg lb	*16 000 *34,300	*16 000 *34,300	*11 750 *25,100	9200 19,850					*8750 *19,250	6450 14,500	5790 18'8"

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				mm ft/in
																
7500 mm 25'0"	kg lb													*4600 *10,250	*4600 *10,250	7210 23'3"
6000 mm 20'0"	kg lb								*6000 *12,600	5050 10,800				*4400 *9,750	4350 9,600	8190 26'8"
4500 mm 15'0"	kg lb							*7200 *15,650	7000 15,100	*6750 *14,700	4950 10,600			*4400 *9,700	3800 8,350	8810 28'9"
3000 mm 10'0"	kg lb			*16 600 *35,300	*16 600 *35,300	*10 700 *23,050	10 350 22,250	*8500 *18,400	6700 14,350	7150 15,350	4750 10,250	*5200	3600	*4550 *10,000	3500 7,700	9140 29'11"
1500 mm 5'0"	kg lb					*13 350 *28,750	9600 20,700	9800 21,000	6350 13,650	6950 14,900	4600 9,850	5250 11,300	3500 7,500	*4850 *10,650	3350 7,400	9210 30'2"
0 mm 0'0"	kg lb			*7050 *16,100	*7050 *16,100	*14 950 *32,350	9150 19,700	9500 20,350	6050 13,050	6800 14,550	4450 9,550	5200	3450	5150 11,350	3400 7,500	9030 29'7"
-1500 mm -5'0"	kg lb	*6450 *14,450	*6450 *14,450	*10 650 *24,150	*10 650 *24,150	14 950 32,050	9000 19,300	9300 20,000	5950 12,750	6700 14,350	4350 9,350			5500 12,150	3650 8,000	8590 28'1"
-3000 mm -10'0"	kg lb	*10 700 *24,000	*10 700 *24,000	*15 850 *35,950	*15 850 *35,950	*14 800 *32,050	9000 19,300	9300 19,950	5900 12,700	6700 14,400	4350 9,400			6300 13,950	4150 9,150	7830 25'6"
-4500 mm -15'0"	kg lb			*18 250 *39,250	*18 250 39,150	*12 950 *27,850	9150 19,700	9450 20,300	6000 13,000					8100 *18,150	5250 11,750	6650 21'6"



ISO 10567:2007





* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



326 Hydraulic Excavator Specifications


Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				mm ft/in
																
7500 mm 25'0"	kg lb													*4600 *10,250	*4600 *10,250	7210 23'3"
6000 mm 20'0"	kg lb									*6000 *12,600	5000 10,700			*4400 *9,750	4300 9,500	8190 26'8"
4500 mm 15'0"	kg lb							*7200 *15,650	6950 14,950	*6750 *14,700	4900 10,450			*4400 *9,700	3750 8,250	8810 28'9"
3000 mm 10'0"	kg lb			*16 600 *35,300	*16 600 *35,300	*10 700 *23,050	10 250 22,050	*8500 *18,400	6600 14,200	7050 15,150	4700 10,100	*5200 3550		*4550 *10,000	3450 7,600	9140 29'11"
1500 mm 5'0"	kg lb					*13 350 *28,750	9500 20,450	9650 20,750	6250 13,450	6850 14,750	4550 9,750	5200 11,150	3450 7,400	*4850 *10,650	3350 7,300	9210 30'2"
0 mm 0'0"	kg lb			*7050 *16,100	*7050 *16,100	*14 950 *31,650	9050 19,450	9350 20,100	6000 12,900	6700 14,400	4400 9,400	5150 11,150	3400 7,400	5100 11,200	3350 7,400	9030 29'7"
-1500 mm -5'0"	kg lb	*6450 *14,450	*6450 *14,450	*10 650 *24,150	*10 650 *24,150	14 800 31,650	8850 19,050	9200 19,750	5850 12,600	6600 14,200	4300 9,250			5450 12,000	3600 7,900	8590 28'1"
-3000 mm -10'0"	kg lb	*10 700 *24,000	*10 700 *24,000	*15 850 *35,950	*15 850 *35,950	14 800 31,650	8850 19,050	9200 19,700	5850 12,550	6600 14,250	4300 9,300			6250 13,800	4100 9,000	7830 25'6"
-4500 mm -15'0"	kg lb			*18 250 *39,250	18 100 38,650	*12 950 *27,850	9050 19,450	9300 20,050	5950 12,850					8000 17,950	5200 11,600	6650 21'6"

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				mm ft/in
																
7500 mm 25'0"	kg lb													*4600 *10,250	*4600 *10,250	7210 23'3"
6000 mm 20'0"	kg lb									*6000 *12,600	4900 10,550			*4400 *9,750	4200 9,350	8190 26'8"
4500 mm 15'0"	kg lb							*7200 *15,650	6850 14,750	*6750 *14,700	4800 10,300			*4400 *9,700	3700 8,100	8810 28'9"
3000 mm 10'0"	kg lb			*16 600 *35,300	*16 600 *35,300	*10 700 *23,050	10 100 21,750	*8500 *18,400	6500 14,000	6950 14,900	4650 9,950	*5200 3500		*4550 *10,000	3400 7,450	9140 29'11"
1500 mm 5'0"	kg lb					*13 350 *28,750	9350 20,150	9500 20,450	6150 13,250	6750 14,500	4450 9,600	5100 11,000	3400 7,300	*4850 *10,650	3300 7,200	9210 30'2"
0 mm 0'0"	kg lb			*7050 *16,100	*7050 *16,100	14 800 31,650	8900 19,150	9200 19,800	5900 12,700	6600 14,150	4300 9,250	5050 11,000	3350 7,300	5000 11,050	3300 7,250	9030 29'7"
-1500 mm -5'0"	kg lb	*6450 *14,450	*6450 *14,450	*10 650 *24,150	*10 650 *24,150	14 550 31,150	8750 18,750	9050 19,450	5750 12,400	6500 13,950	4250 9,100			5350 11,800	3550 7,750	8590 28'1"
-3000 mm -10'0"	kg lb	*10 700 *24,000	*10 700 *24,000	*15 850 *35,950	*15 850 *35,950	14 550 31,200	8750 18,800	9050 19,400	5750 12,350	6500 14,000	4250 9,150			6150 13,550	4000 8,850	7830 25'6"
-4500 mm -15'0"	kg lb			*18 250 *39,250	17 800 38,100	*12 950 *27,850	8900 19,150	9150 19,750	5850 12,650					7900 17,650	5100 11,450	6650 21'6"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

326 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: Off

																
		1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				
																mm ft/in
12 000 mm 40'0"	kg lb													*1300 *2,850	*1300 *2,850	13 940 45'3"
10 500 mm 35'0"	kg lb													*1250 *2,700	*1250 *2,700	14 930 48'7"
9000 mm 30'0"	kg lb													*1200 *2,650	*1200 *2,650	15 720 51'4"
7500 mm 25'0"	kg lb													*1200 *2,650	*1200 *2,650	16 330 53'5"
6000 mm 20'0"	kg lb													*1200 *2,650	*1200 *2,650	16 780 54'11"
4500 mm 15'0"	kg lb													*1250 *2,700	*1250 *2,700	17 090 56'0"
3000 mm 10'0"	kg lb			*4800	*4800							*3150 *6,850	*3150 *6,850	*1300 *2,800	*1300 *2,800	17 260 56'7"
1500 mm 5'0"	kg lb			*1500 *3,500	*1500 *3,500	*5400 *12,750	*5400 *12,750	*5700 *12,200	*5700 *12,200	*4400 *9,450	*4400 *9,450	*3650 *7,850	*3650 *7,850	*1350 *2,900	*1350 *2,900	17 300 56'8"
0 mm 0'0"	kg lb			*1600 *3,600	*1600 *3,600	*3600 *8,250	*3600 *8,250	*6600 *14,250	6400 13,850	*5000 *10,800	4850 10,400	*4050 *8,750	3800 8,200	*1400 *3,050	1350 2,950	17 200 56'5"
-1500 mm -5'0"	kg lb	*1550 *3,400	*1550 *3,400	*2050 *4,600	*2050 *4,600	*3450 *7,850	*3450 *7,850	*6500 *14,950	5900 12,750	*5500 *11,900	4450 9,650	*4450 *9,600	3550 7,600	*1500 *3,300	1350 2,950	16 970 55'7"
-3000 mm -10'0"	kg lb	*2150 *4,750	*2150 *4,750	*2650 *5,900	*2650 *5,900	*3800 *8,550	*3800 *8,550	*6200 *14,100	5650 12,150	*5900 *12,700	4250 9,100	*4750 *10,250	3350 7,200	*1650 *3,550	1350 3,000	16 610 54'5"
-4500 mm -15'0"	kg lb	*2750 *6,100	*2750 *6,100	*3250 *7,300	*3250 *7,300	*4350 *9,800	*4350 *9,800	*6500 *14,750	5500 11,850	*6100 *13,200	4100 8,800	*4950 *10,700	3200 6,900	*1800 *3,950	1450 3,150	16 090 52'8"
-6000 mm -20'0"	kg lb	*3350 *7,500	*3350 *7,500	*3950 *8,800	*3950 *8,800	*5050 *11,400	*5050 *11,400	*7150 *16,250	5500 11,850	*6200 *13,400	4050 8,700	*5050 *10,900	3150 6,800	*2050 *4,500	1550 3,350	15 410 50'4"
-7500 mm -25'0"	kg lb	*4050 *9,000	*4050 *9,000	*4700 *10,550	*4700 *10,550	*5900 *13,300	*5900 *13,300	*7800 *16,850	5550 11,950	*6150 *13,300	4050 8,750	*5050 *10,900	3150 6,800	*2350 *5,250	1700 3,700	14 540 47'5"
-9000 mm -30'0"	kg lb	*4750 *10,650	*4750 *10,650	*5550 *12,450	*5550 *12,450	*6900 *15,650	*6900 *15,650	*7450 *16,100	5700 12,250	*5950 *12,850	4150 8,900	*4900 *10,550	3200 6,950	*2900 *6,450	1900 4,250	13 450 43'8"
-10 500 mm -35'0"	kg lb	*5550 *12,450	*5550 *12,450	*6500 *14,700	*6500 *14,700	*8200 *18,600	*8200 *18,600	*6900 *14,800	5900 12,750	*5550 *11,900	4300 9,250	*4600 *9,800	3350 7,200	*3150 *6,900	2300 5,200	12 080 39'0"
-12 000 mm -40'0"	kg lb			*7650 *17,350	*7650 *17,350	*7700 *16,300	*7700 *16,300	*6000 *12,750	*6000 *12,750	*4850 *10,250	4500 9,800	*3950 *8,300	3550 7,700	*3300 *7,250	3000 6,900	10 300 32'10"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.






Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

326 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: Off (continued)

		7.85 m (25'9'')				10.2 m (33'6'')						790 mm (31'') Triple Grouser Track Shoes								3830 mm (12'7'')		4640 mm (15'3'')	
		10 500 mm/35'0"		12 000 mm/40'0"		13 500 mm/45'0"		15 000 mm/50'0"		16 500 mm/55'0"													
																mm	ft/in						
12 000 mm 40'0"	kg lb					*1750 *3,050	*1750 *3,050									*1300 *2,850	*1300 *2,850	13 940 45'3"					
10 500 mm 35'0"	kg lb					*1900 *4,150	*1900 *4,150									*1250 *2,700	*1250 *2,700	14 930 48'7"					
9000 mm 30'0"	kg lb					*1900 *4,200	*1900 *4,200	*1950 *3,700	*1950 *3,700							*1200 *2,650	*1200 *2,650	15 720 51'4"					
7500 mm 25'0"	kg lb					*2000 *4,300	*2000 *4,300	*2000 *4,350	*2000 *4,350							*1200 *2,650	*1200 *2,650	16 330 53'5"					
6000 mm 20'0"	kg lb					*2100 *4,550	*2100 *4,550	*2050 *4,500	*2050 4,400	*1600	*1600					*1200 *2,650	*1200 *2,650	16 780 54'11"					
4500 mm 15'0"	kg lb					*2350 *5,100	*2350 *5,100	*2250 *4,850	2000 4,250	*2000 *3,700	1650 3,450					*1250 *2,700	*1250 *2,700	17 090 56'0"					
3000 mm 10'0"	kg lb	*2800 *6,100	*2800 *6,100	*2550 *5,550	*2550 *5,550	*2400 *5,200	2350 5,000	*2250 *4,950	1900 4,050	*2200 *4,350	1550 3,300	*1300 *2,800	*1300 *2,800			*1300 *2,800	*1300 *2,800	17 260 56'7"					
1500 mm 5'0"	kg lb	*3150 *6,800	*3150 *6,800	*2800 *6,050	2700 5,750	*2550 *5,550	2200 4,700	*2400 *5,200	1850 3,900	*2300 *4,700	1500 3,200	*1350 *2,900	*1350 *2,900			*1350 *2,900	*1350 *2,900	17 300 56'8"					
0 mm 0'0"	kg lb	*3450 *7,450	3050 6,600	*3050 *6,550	2500 5,400	*2750 *5,950	2100 4,450	*2550 *5,500	1750 3,700	*2350 *4,700	1450 3,100	*1400 *3,050	1350 2,950			*1400 *3,050	1350 2,950	17 200 56'5"					
-1500 mm -5'0"	kg lb	*3750 *8,100	2900 6,150	*3250 *7,050	2400 5,100	*2900 *6,300	2000 4,250	*2650 *5,750	1650 3,550	*2300 *4,150	1400 3,000	*1500 *3,300	1350 2,950			*1500 *3,300	1350 2,950	16 970 55'7"					
-3000 mm -10'0"	kg lb	*3950 *8,600	2750 5,850	*3450 *7,450	2250 4,850	*3050 *6,550	1900 4,050	2600 5,600	1600 3,450	*1850 *3,450	1400 3,000	*1650 *3,550	1350 3,000			*1650 *3,550	1350 3,000	16 610 54'5"					
-4500 mm -15'0"	kg lb	*4150 *8,950	2650 5,650	3500 7,550	2200 4,700	3000 6,450	1850 3,950	2600 5,550	1600 3,400							*1800 *3,950	1450 3,150	16 090 52'8"					
-6000 mm -20'0"	kg lb	4150 8,950	2550 5,500	3500 7,500	2150 4,600	2950 6,400	1850 3,900	2600 *5,150	1600 3,400							*2050 *4,500	1550 3,350	15 410 50'4"					
-7500 mm -25'0"	kg lb	4150 8,950	2550 5,500	3500 7,500	2150 4,600	3000 6,450	1850 3,950									*2350 *5,250	1700 3,700	14 540 47'5"					
-9000 mm -30'0"	kg lb	*4150 *8,850	2600 5,650	*3500 *7,500	2200 4,750											*2900 *6,450	1900 4,250	13 450 43'8"					
-10 500 mm -35'0"	kg lb	*3850 *8,150	2750 5,900	*3150	2300											*3150 *6,900	2300 5,200	12 080 39'0"					
-12 000 mm -40'0"	kg lb															*3300 *7,250	3000 6,900	10 300 32'10"					



ISO 10567:2007







* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

326 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: Off

																
		1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				
																mm ft/in
12 000 mm 40'0"	kg lb													*1300 *2,850	*1300 *2,850	13 940 45'3"
10 500 mm 35'0"	kg lb													*1250 *2,700	*1250 *2,700	14 930 48'7"
9000 mm 30'0"	kg lb													*1200 *2,650	*1200 *2,650	15 720 51'4"
7500 mm 25'0"	kg lb													*1200 *2,650	*1200 *2,650	16 330 53'5"
6000 mm 20'0"	kg lb													*1200 *2,650	*1200 *2,650	16 780 54'11"
4500 mm 15'0"	kg lb													*1250 *2,700	*1250 *2,700	17 090 56'0"
3000 mm 10'0"	kg lb			*4800 *10,560	*4800 *10,560							*3150 *6,850	*3150 *6,850	*1300 *2,800	*1300 *2,800	17 260 56'7"
1500 mm 5'0"	kg lb			*1500 *3,500	*1500 *3,500	*5400 *12,750	*5400 *12,750	*5700 *12,200	*5700 *12,200	*4400 *9,450	*4400 *9,450	*3650 *7,850	*3650 *7,850	*1350 *2,900	*1350 *2,900	17 300 56'8"
0 mm 0'0"	kg lb			*1600 *3,600	*1600 *3,600	*3600 *8,250	*3600 *8,250	*6600 *14,250	6350 13,650	*5000 *10,800	4800 10,300	*4050 *8,750	3750 8,100	*1400 *3,050	1350 2,900	17 200 56'5"
-1500 mm -5'0"	kg lb	*1550 *3,400	*1550 *3,400	*2050 *4,600	*2050 *4,600	*3450 *7,850	*3450 *7,850	*6500 *14,950	5850 12,600	*5500 *11,900	4400 9,500	*4450 *9,600	3500 7,500	*1500 *3,300	1350 2,900	16 970 55'7"
-3000 mm -10'0"	kg lb	*2150 *4,750	*2150 *4,750	*2650 *5,900	*2650 *5,900	*3800 *8,550	*3800 *8,550	*6200 *14,100	5550 12,000	*5900 *12,700	4150 9,000	*4750 *10,250	3300 7,100	*1650 *3,550	1350 2,950	16 610 54'5"
-4500 mm -15'0"	kg lb	*2750 *6,100	*2750 *6,100	*3250 *7,300	*3250 *7,300	*4350 *9,800	*4350 *9,800	*6500 *14,750	5450 11,700	*6100 *13,200	4050 8,700	*4950 *10,700	3200 6,800	*1800 *3,950	1400 3,100	16 090 52'8"
-6000 mm -20'0"	kg lb	*3350 *7,500	*3350 *7,500	*3950 *8,800	*3950 *8,800	*5050 *11,400	*5050 *11,400	*7150 *16,250	5400 11,650	*6200 *13,400	4000 8,550	*5050 *10,900	3100 6,700	*2050 *4,500	1500 3,300	15 410 50'4"
-7500 mm -25'0"	kg lb	*4050 *9,000	*4050 *9,000	*4700 *10,550	*4700 *10,550	*5900 *13,300	*5900 *13,300	*7800 *16,850	5500 11,800	*6150 *13,300	4000 8,600	*5050 *10,900	3100 6,700	*2350 *5,250	1650 3,650	14 540 47'5"
-9000 mm -30'0"	kg lb	*4750 *10,650	*4750 *10,650	*5550 *12,450	*5550 *12,450	*6900 *15,650	*6900 *15,650	*7450 *16,100	5600 12,100	*5950 *12,850	4100 8,800	*4900 *10,550	3150 6,850	*2900 *6,450	1900 4,200	13 450 43'8"
-10 500 mm -35'0"	kg lb	*5550 *12,450	*5550 *12,450	*6500 *14,700	*6500 *14,700	*8200 *18,600	*8200 *18,600	*6900 *14,800	5850 12,600	*5550 *11,900	4250 9,150	*4600 *9,800	3300 7,100	*3150 *6,900	2300 5,100	12 080 39'0"
-12 000 mm -40'0"	kg lb			*7650 *17,350	*7650 *17,350	*7700 *16,300	*7700 *16,300	*6000 *12,750	*6000 *12,750	*4850 *10,250	4450 9,700	*3950 *8,300	3500 7,600	*3300 *7,250	2950 6,800	10 300 32'10"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

326 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: Off (continued)



		10 500 mm/35'0"		12 000 mm/40'0"		13 500 mm/45'0"		15 000 mm/50'0"		16 500 mm/55'0"				
														mm ft/in
12 000 mm 40'0"	kg lb					*1750 *3,050	*1750 *3,050					*1300 *2,850	*1300 *2,850	13 940 45'3"
10 500 mm 35'0"	kg lb					*1900 *4,150	*1900 *4,150					*1250 *2,700	*1250 *2,700	14 930 48'7"
9000 mm 30'0"	kg lb					*1900 *4,200	*1900 *4,200	*1950 *3,700	*1950 *3,700			*1200 *2,650	*1200 *2,650	15 720 51'4"
7500 mm 25'0"	kg lb					*2000 *4,300	*2000 *4,300	*2000 *4,350	*2000 *4,350			*1200 *2,650	*1200 *2,650	16 330 53'5"
6000 mm 20'0"	kg lb			*4,650	*4,650	*2100 *4,550	*2100 *4,550	*2050 *4,500	2050 4,350	*1600	*1600	*1200 *2,650	*1200 *2,650	16 780 54'11"
4500 mm 15'0"	kg lb			*2350 *5,100	*2350 *5,100	*2250 *4,850	*2250 *4,850	*2150 *4,700	2000 4,200	*2000 *3,700	1600 3,400	*1250 *2,700	*1250 *2,700	17 090 56'0"
3000 mm 10'0"	kg lb	*2800 *6,100	*2800 *6,100	*2550 *5,550	*2550 *5,550	*2400 *5,200	2300 4,900	*2250 *4,950	1900 4,000	*2200 *4,350	1550 3,250	*1300 *2,800	*1300 *2,800	17 260 56'7"
1500 mm 5'0"	kg lb	*3150 *6,800	*3150 *6,800	*2800 *6,050	2650 5,700	*2550 *5,550	2200 4,650	*2400 *5,200	1800 3,850	*2300 *4,700	1500 3,150	*1350 *2,900	*1350 *2,900	17 300 56'8"
0 mm 0'0"	kg lb	*3450 *7,450	3050 6,500	*3050 *6,550	2500 5,300	*2750 *5,950	2050 4,400	*2550 *5,500	1700 3,650	2350 *4,700	1450 3,050	*1400 *3,050	1350 2,900	17 200 56'5"
-1500 mm -5'0"	kg lb	*3750 *8,100	2850 6,100	*3250 *7,050	2350 5,000	*2900 *6,300	1950 4,200	2650 5,650	1650 3,500	2300 *4,150	1400 2,950	*1500 *3,300	1350 2,900	16 970 55'7"
-3000 mm -10'0"	kg lb	*3950 *8,600	2700 5,750	*3450 *7,450	2250 4,750	3000 6,450	1900 4,000	2600 5,550	1600 3,400	*1850	1350	*1650 *3,550	1350 2,950	16 610 54'5"
-4500 mm -15'0"	kg lb	*4150 *8,950	2600 5,550	3500 7,450	2150 4,600	2950 6,350	1800 3,900	2550 5,500	1550 3,350			*1800 *3,950	1400 3,100	16 090 52'8"
-6000 mm -20'0"	kg lb	4100 8,850	2550 5,450	3450 7,400	2100 4,550	2950 6,300	1800 3,850	2550 *5,150	1550 3,350			*2050 *4,500	1500 3,300	15 410 50'4"
-7500 mm -25'0"	kg lb	4100 8,850	2550 5,450	3450 7,400	2100 4,550	2950 6,350	1800 3,900					*2350 *5,250	1650 3,650	14 540 47'5"
-9000 mm -30'0"	kg lb	4150 *8,850	2600 5,550	3500 *7,500	2150 4,650							*2900 *6,450	1900 4,200	13 450 43'8"
-10 500 mm -35'0"	kg lb	*3850 *8,150	2700 5,800	*3150	2300							*3150 *6,900	2300 5,100	12 080 39'0"
-12 000 mm -40'0"	kg lb											*3300 *7,250	2950 6,800	10 300 32'10"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.


326 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: Off


7.85 m (25'9") 10.2 m (33'6")



600 mm (24") Single Grouser Track Shoes



3830 mm (12'7")



		1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				
																mm ft/in
12 000 mm 40'0"	kg lb													*1300 *2,850	*1300 *2,850	13 940 45'3"
10 500 mm 35'0"	kg lb													*1250 *2,700	*1250 *2,700	14 930 48'7"
9000 mm 30'0"	kg lb													*1200 *2,650	*1200 *2,650	15 720 51'4"
7500 mm 25'0"	kg lb													*1200 *2,650	*1200 *2,650	16 330 53'5"
6000 mm 20'0"	kg lb													*1200 *2,650	*1200 *2,650	16 780 54'11"
4500 mm 15'0"	kg lb													*1250 *2,700	*1250 *2,700	17 090 56'0"
3000 mm 10'0"	kg lb			*4800 *10,560	*4800 *10,560							*3150 *6,850	*3150 *6,850	*1300 *2,800	*1300 *2,800	17 260 56'7"
1500 mm 5'0"	kg lb			*1500 *3,300	*1500 *3,300	*5400 *12,000	*5400 *12,000	*5700 *12,500	*5700 *12,500	*4400 *9,700	*4400 *9,700	*3650 *8,050	*3650 *8,050	*1350 *2,900	*1350 *2,900	17 300 56'8"
0 mm 0'0"	kg lb			*1600 *3,600	*1600 *3,600	*3600 *8,000	*3600 *8,000	*6600 *14,500	6250 13,900	*5000 *10,900	4700 10,350	*4050 *8,900	3700 8,150	*1400 *3,050	1300 2,850	17 200 56'5"
-1500 mm -5'0"	kg lb	*1550 *3,400	*1550 *3,400	*2050 *4,600	*2050 *4,600	*3450 *7,800	*3450 *7,800	*6500 *14,400	5750 12,650	*5500 *11,900	4350 9,550	*4450 *9,800	3450 7,600	*1500 *3,300	1300 2,850	16 970 55'7"
-3000 mm -10'0"	kg lb	*2150 *4,750	*2150 *4,750	*2650 *5,900	*2650 *5,900	*3800 *8,500	*3800 *8,500	*6200 *14,100	5500 11,800	*5900 *12,700	4100 8,950	*4750 *10,250	3250 7,200	*1650 *3,550	1300 2,900	16 610 54'5"
-4500 mm -15'0"	kg lb	*2750 *6,100	*2750 *6,100	*3250 *7,300	*3250 *7,300	*4350 *9,800	*4350 *9,800	*6500 *14,500	5350 11,800	*6100 *13,200	3950 8,750	*4950 *10,700	3100 6,800	*1800 *3,950	1400 3,000	16 090 52'8"
-6000 mm -20'0"	kg lb	*3350 *7,500	*3350 *7,500	*3950 *8,800	*3950 *8,800	*5050 *11,100	*5050 *11,100	*7150 *16,250	5350 11,800	*6200 *13,400	3900 8,600	*5000 *10,750	3050 6,700	*2050 *4,500	1500 3,250	15 410 50'4"
-7500 mm -25'0"	kg lb	*4050 *9,000	*4050 *9,000	*4700 *10,550	*4700 *10,550	*5900 *13,000	*5900 *13,000	*7800 *16,850	5400 11,900	*6150 *13,300	3950 8,700	*5000 *10,750	3050 6,700	*2350 *5,250	1650 3,600	14 540 47'5"
-9000 mm -30'0"	kg lb	*4750 *10,650	*4750 *10,650	*5550 *12,450	*5550 *12,450	*6900 *15,300	*6900 *15,300	*7450 *16,400	5550 12,300	*5950 *12,850	4000 8,800	*4900 *10,550	3100 6,800	*2900 *6,450	1850 4,150	13 450 43'8"
-10 500 mm -35'0"	kg lb	*5550 *12,450	*5550 *12,450	*6500 *14,300	*6500 *14,300	*8200 *18,300	*8200 *18,300	*6900 *15,300	5750 12,650	*5550 *12,300	4150 9,100	*4600 *9,900	3250 7,100	*3150 *6,900	2250 5,050	12 080 39'0"
-12 000 mm -40'0"	kg lb			*7650 *17,000	*7650 *17,000	*7700 *17,000	*7700 *17,000	*6000 *13,200	*6000 *13,200	*4850 *10,700	4400 9,700	*3950 *8,700	3450 7,600	*3300 *7,250	2900 6,400	10 300 32'10"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.






Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

326 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: Off (continued)

															
		10 500 mm/35'0"		12 000 mm/40'0"		13 500 mm/45'0"		15 000 mm/50'0"		16 500 mm/55'0"					
													mm ft/in		
12 000 mm 40'0"	kg lb					*1750 *3,050	*1750 *3,050					*1300 *2,850	*1300 *2,850	13 940 45'3"	
10 500 mm 35'0"	kg lb					*1900 *4,150	*1900 *4,150					*1250 *2,700	*1250 *2,700	14 930 48'7"	
9000 mm 30'0"	kg lb					*1900 *4,200	*1900 *4,200	*1950 *3,700	*1950 *3,700			*1200 *2,650	*1200 *2,650	15 720 51'4"	
7500 mm 25'0"	kg lb					*2000 *4,300	*2000 *4,300	*2000 *4,350	*2000 *4,350			*1200 *2,650	*1200 *2,650	16 330 53'5"	
6000 mm 20'0"	kg lb					*2100 *4,550	*2100 *4,550	*2050 *4,500	2000 4,300	*1600 *1600		*1200 *2,650	*1200 *2,650	16 780 54'11"	
4500 mm 15'0"	kg lb					*2350 *5,100	*2350 *5,100	*2250 *4,850	*2250 *4,850	*2150 *4,700	1950 4,150	*2000 *3,700	1600 3,300	*1250 *2,700	17 090 56'0"
3000 mm 10'0"	kg lb	*2800 *6,100	*2800 *6,100	*2550 *5,550	*2550 *5,550	*2400 *5,200	2250 4,850	*2250 *4,950	1850 3,950	*2200 *4,350	1500 3,200	*1300 *2,800	*1300 *2,800	17 260 56'7"	
1500 mm 5'0"	kg lb	*3150 *6,800	*3150 *6,800	*2800 *6,050	2600 5,600	*2550 *5,550	2150 4,600	*2400 *5,200	1750 3,750	*2300 *4,700	1450 3,100	*1350 *2,900	1300 2,900	17 300 56'8"	
0 mm 0'0"	kg lb	*3450 *7,450	3000 6,400	*3050 *6,550	2450 5,250	*2750 *5,950	2050 4,300	*2550 *5,500	1700 3,600	2300 *4,700	1400 3,000	*1400 *3,050	1300 2,850	17 200 56'5"	
-1500 mm -5'0"	kg lb	*3750 *8,100	2800 6,000	*3250 *7,050	2300 4,950	*2900 *6,300	1900 4,100	2600 5,550	1600 3,450	2250 *4,150	1350 2,900	*1500 *3,300	1300 2,850	16 970 55'7"	
-3000 mm -10'0"	kg lb	*3950 *8,600	2650 5,650	*3450 *7,450	2200 4,700	2950 6,350	1850 3,950	2550 5,450	1550 3,300	*1850 *1850	1350	*1650 *3,550	1300 2,900	16 610 54'5"	
-4500 mm -15'0"	kg lb	4100 8,800	2550 5,450	3400 7,350	2100 4,500	2900 6,250	1800 3,800	2500 5,400	1550 3,250			*1800 *3,950	1400 3,000	16 090 52'8"	
-6000 mm -20'0"	kg lb	4050 8,700	2500 5,350	3400 7,250	2050 4,450	2900 6,200	1750 3,750	2500 *5,150	1550 3,250			*2050 *4,500	1500 3,250	15 410 50'4"	
-7500 mm -25'0"	kg lb	4050 8,700	2500 5,350	3400 7,250	2100 4,450	2900 6,250	1800 3,800					*2350 *5,250	1650 3,600	14 540 47'5"	
-9000 mm -30'0"	kg lb	4100 8,800	2550 5,450	3450 7,400	2150 4,600							*2900 *6,450	1850 4,150	13 450 43'8"	
-10 500 mm -35'0"	kg lb	*3850 *8,150	2650 5,700	*3150	2250							*3150 *6,900	2250 5,050	12 080 39'0"	
-12 000 mm -40'0"	kg lb											*3300 *7,250	2900 6,700	10 300 32'10"	



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

326 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility

Counterweight									4600 kg (10,140 lb)		7400 kg (16,310 lb)
	Linkage	Width		Capacity		Weight		Fill	Reach Boom		SLR Boom
		mm	in	m³	yd³	kg	lb	%	R2.95 (9'8")	R3.6 (11'10")	SLR 7.85 (25'9")
Pin-On (No Quick Coupler)											
General Duty Capacity	CB	600	24	0.63	0.83	700	1,543	100	●	●	
	CB	750	30	0.86	1.13	836	1,843	100	●	●	
	CB	900	36	1.09	1.43	943	2,079	100	●	●	
	CB	1050	42	1.34	1.75	1011	2,229	100	●	⊙	
	CB	1200	48	1.58	2.07	1106	2,439	100	⊙	○	
	CB	1350	54	1.83	2.40	1202	2,650	100	⊖	○	
General Duty Capacity Wide Tips	CB	600	24	0.63	0.83	697	1,537	100	●	●	
	CB	750	30	0.86	1.13	834	1,839	100	●	●	
	CB	900	36	1.09	1.43	941	2,075	100	●	●	
	CB	1050	42	1.34	1.75	1008	2,223	100	●	⊙	
	CB	1200	48	1.58	2.07	1104	2,434	100	⊙	⊖	
	CB	1350	54	1.83	2.40	1199	2,644	100	⊖	○	
Heavy Duty	CB	600	24	0.52	0.68	730	1,608	100	●	●	
	CB	750	30	0.71	0.93	848	1,869	100	●	●	
	CB	900	36	0.91	1.19	941	2,075	100	●	●	
	CB	1050	42	1.12	1.46	1035	2,283	100	●	●	
	CB	1200	48	1.33	1.74	1107	2,440	100	●	⊙	
	CB	1350	54	1.54	2.02	1205	2,657	100	⊙	⊖	
	CB	1500	60	1.76	2.30	1298	2,861	100	⊖	○	
	CB	1650	66	1.97	2.58	1375	3,031	100	○	◇	
Heavy Duty Power	CB	1050	42	1.12	1.47	1065	2,347	100	●	●	
	CB	1200	48	1.33	1.73	1143	2,519	100	●	⊙	
	CB	1350	54	1.53	2.01	1246	2,748	100	⊙	⊖	
Severe Duty	CB	600	24	0.52	0.68	752	1,657	90	●	●	
	CB	750	30	0.71	0.93	912	2,010	90	●	●	
	CB	900	36	0.91	1.19	995	2,194	90	●	●	
	CB	1050	42	1.12	1.46	1094	2,411	90	●	●	
	CB	1200	48	1.33	1.74	1172	2,583	90	●	⊙	
Ditch Cleaning	312, A	1200	48	0.57	0.74	364	803	100			◇
	312, A	1500	60	0.74	0.97	455	1,003	100			X
Maximum load with pin-on (payload + bucket)								kg	3966	3429	1044
								lb	8,744	7,560	2,302

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

326 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility *(continued)*

Counterweight									4600 kg (10,140 lb)		7400 kg (16,310 lb)
	Linkage	Width		Capacity		Weight		Fill	Reach Boom		SLR Boom
		mm	in	m³	yd³	kg	lb	%	R2.95 (9'8")	R3.6 (11'10")	SLR 7.85 (25'9")
With Cat Pin Grabber Coupler											
General Duty Capacity	CB	600	24	0.63	0.83	700	1,543	100	●	●	
	CB	750	30	0.86	1.13	836	1,843	100	●	●	
	CB	900	36	1.09	1.43	943	2,079	100	●	⊙	
	CB	1050	42	1.34	1.75	1011	2,229	100	⊙	⊖	
	CB	1200	48	1.58	2.07	1106	2,439	100	⊖	○	
	CB	1350	54	1.83	2.40	1202	2,650	100	○	◇	
General Duty Capacity Wide Tips	CB	600	24	0.63	0.83	697	1,537	100	●	●	
	CB	750	30	0.86	1.13	834	1,839	100	●	●	
	CB	900	36	1.09	1.43	941	2,075	100	●	⊙	
	CB	1050	42	1.34	1.75	1008	2,223	100	⊙	⊖	
	CB	1200	48	1.58	2.07	1104	2,434	100	⊖	○	
	CB	1350	54	1.83	2.40	1199	2,644	100	○	◇	
Heavy Duty	CB	600	24	0.52	0.68	730	1,608	100	●	●	
	CB	750	30	0.71	0.93	848	1,869	100	●	●	
	CB	900	36	0.91	1.19	941	2,075	100	●	●	
	CB	1050	42	1.12	1.46	1035	2,283	100	●	⊖	
	CB	1200	48	1.33	1.74	1107	2,440	100	⊙	○	
	CB	1350	54	1.54	2.02	1205	2,657	100	⊖	◇	
	CB	1500	60	1.76	2.30	1298	2,861	100	○	◇	
	CB	1650	66	1.97	2.58	1375	3,031	100	○	◇	
Heavy Duty Power	CB	1050	42	1.12	1.47	1065	2,347	100	●	⊖	
	CB	1200	48	1.33	1.73	1143	2,519	100	⊙	○	
	CB	1350	54	1.53	2.01	1246	2,748	100	⊖	◇	
Heavy Duty Pin Grabber Performance	CB	750	30	0.70	0.91	876	1,931	100	●	●	
	CB	1050	42	1.08	1.42	1105	2,436	100	●	⊖	
	CB	1200	48	1.28	1.68	1186	2,614	100	⊙	○	
	CB	1350	54	1.49	1.94	1292	2,849	100	⊖	◇	
	CB	1500	60	1.69	2.21	1398	3,082	100	○	◇	
Severe Duty	CB	600	24	0.52	0.68	752	1,657	90	●	●	
	CB	750	30	0.71	0.93	912	2,010	90	●	●	
	CB	900	36	0.91	1.19	995	2,194	90	●	●	
	CB	1050	42	1.12	1.46	1094	2,411	90	●	⊙	
	CB	1200	48	1.33	1.74	1172	2,583	90	⊙	⊖	
Severe Duty Pin Grabber Performance	CB	600	24	0.51	0.66	829	1,828	90	●	●	
	CB	900	36	0.88	1.16	1057	2,331	90	●	●	
	CB	1050	42	1.08	1.42	1165	2,568	90	●	⊙	
	CB	1200	48	1.28	1.68	1252	2,760	100	⊙	○	
Maximum load with coupler (payload + bucket)								kg	3440	2903	518
								lb	7,583	6,399	1,141

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

326 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility *(continued)*

Counterweight									4600 kg (10,140 lb)	
	Linkage	Width		Capacity		Weight		Fill	Reach Boom	
		mm	in	m³	yd³	kg	lb	%	R2.95 (9'8")	R3.6 (11'10")
PIN-ON, TRS23 S70										
Heavy Duty – Grading	CB	1800	71	1.15	1.50	783	1,726	100	●	⊖
	CB	2000	79	1.30	1.70	948	2,090	100	⊖	○
Maximum load with pin-on (payload + bucket)								kg	3,160	2,623
								lb	6,967	5,783
With S70, TRS23 S70										
Heavy Duty – Grading	CB	1800	71	1.15	1.50	783	1,726	100	⊙	○
	CB	2000	79	1.30	1.70	948	2,090	100	⊖	◇
Maximum load with pin-on (payload + bucket)								kg	2,875	2,338
								lb	6,338	5,154

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

326 Hydraulic Excavator Specifications

Attachments Offering Guide

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ No Match

PIN-ON ATTACHMENTS

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 GC	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 GC	✓	✓
	H130 GC S	✓	✓
	H130 S	✓	✓
	H140 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw	✓	✓
	MP324 Demolition Jaw	✓	✓
	MP324 Pulverizer Jaw	✓	✓*
	MP324 Shear Jaw	✓	✓
	MP324 Tank Shear Jaw	✓	✓
	MP324 Universal Jaw	✓	✓
Demolition and Sorting Grapples	G324	✓	✓
	G324 WH-1500	✓	✓
	G324 WH-1800	✓	
	G324 WH-2000	✓*	
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓
	S3035 Flat Top	✓*	
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P224 Secondary Pulverizer	✓	✓*
	P318 Primary Pulverizer	✓	✓
	P324 Primary Pulverizer	✓	✓*
Mulchers	HM4015	✓	✓
	HM4815	✓	✓
	HM5515	✓	✓
	HM6015	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
	RC30	✓	✓

(continued on next page)

326 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ 1800 kg/m³ (3,000 lb/yd³)

☐ 1200 kg/m³ (2,000 lb/yd³)

☐ No Match

PIN-ON ATTACHMENTS

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Orange Peel Grapples	GSH425-750	●	●
	GSH425-950	●	●
	GSH425-1150	●	○
	GSH440-1150	○	
	GSH525-750	●	●
	GSH525-950	●	○
	GSH525-1150	○	○

(continued on next page)

326 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ No Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 GC	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 GC	✓	✓
	H130 GC S	✓	✓
	H130 S	✓	✓
	H140 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw	✓*	
	MP324 Demolition Jaw	✓*	
	MP324 Shear Jaw	✓	
	MP324 Tank Shear Jaw	✓*	
	MP324 Universal Jaw	✓*	
Demolition and Sorting Grapples	G324	✓*	
	G324 WH-1500	✓*	
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P318 Primary Pulverizer	✓	✓
	P324 Primary Pulverizer	✓*	
Mulchers	HM4015	✓	✓
	HM4815	✓	✓
	HM5515	✓	✓
	HM6015	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
	RC30	✓	✓

(continued on next page)

326 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ No Match

S70 DEDICATED COUPLER ATTACHMENTS

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 S	✓	✓
	H140 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw	✓	✓*
	MP324 Demolition Jaw	✓	✓*
	MP324 Pulverizer Jaw	✓	
	MP324 Shear Jaw	✓	✓
	MP324 Tank Shear Jaw	✓	
	MP324 Universal Jaw	✓	✓*
Demolition and Sorting Grapples	G324	✓	✓*
	G324 WH-1500	✓	
	G324 WH-1800	✓*	
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P224 Secondary Pulverizer	✓	
	P318 Primary Pulverizer	✓	✓
	P324 Primary Pulverizer	✓	
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
	RC30	✓	✓

(continued on next page)

326 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ No Match

S80 DEDICATED COUPLER ATTACHMENTS

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 S	✓	✓
	H130 GC S	✓	✓
	H130 S	✓	✓
	H140 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw	✓	
	MP324 Demolition Jaw	✓	
	MP324 Pulverizer Jaw	✓*	
	MP324 Shear Jaw	✓	
	MP324 Tank Shear Jaw	✓*	
	MP324 Universal Jaw	✓*	
Demolition and Sorting Grapples	G324	✓	
	G324 WH-1500	✓*	
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P224 Secondary Pulverizer	✓*	
	P318 Primary Pulverizer	✓	✓
	P324 Primary Pulverizer	✓*	
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
	RC30	✓	✓

(continued on next page)

326 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ No Match

HCS70 DEDICATED COUPLER ATTACHMENTS

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 S	✓	✓
	H130 S	✓	✓
	H140 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw	✓	
	MP324 Demolition Jaw	✓	
	MP324 Pulverizer Jaw	✓*	
	MP324 Shear Jaw	✓	✓*
	MP324 Tank Shear Jaw	✓*	
	MP324 Universal Jaw	✓	
Demolition and Sorting Grapples	G324	✓	
	G324		
	G324 WH-1500	✓*	
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P224 Secondary Pulverizer	✓*	
	P318 Primary Pulverizer	✓	✓
	P324 Primary Pulverizer	✓*	
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
	RC30	✓	✓

(continued on next page)

326 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ No Match

HCS70/55 DEDICATED COUPLER ATTACHMENTS

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 S	✓	✓
	H130 S	✓	✓
	H140 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw	✓	
	MP324 Demolition Jaw	✓	
	MP324 Pulverizer Jaw	✓*	
	MP324 Shear Jaw	✓	✓*
	MP324 Tank Shear Jaw	✓*	
	MP324 Universal Jaw	✓*	
Demolition and Sorting Grapples	G324	✓	
	G324 WH-1500	✓*	
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P224 Secondary Pulverizer	✓*	
	P318 Primary Pulverizer	✓	✓
	P324 Primary Pulverizer	✓*	
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
	RC30	✓	✓

(continued on next page)

326 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ No Match

HCS80 DEDICATED COUPLER ATTACHMENTS

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 S	✓	✓
	H130 S	✓	✓
	H140 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw	✓*	
	MP324 Demolition Jaw	✓*	
	MP324 Shear Jaw	✓*	
	MP324 Universal Jaw	✓*	
Demolition and Sorting Grapples	G324	✓*	
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓*
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P318 Primary Pulverizer	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
	RC30	✓	✓

TRS23 (PIN-ON TOP/S70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 S	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

326 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match ☐ * Working range front only ☐ No Match

TRS23 (S70 TOP/S70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 S	✓	✓*
Compactors (Vibratory Plate)	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

TRS23 (PIN-ON TOP/S80 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 S	✓	✓*
Compactors (Vibratory Plate)	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

TRS23 (S80 TOP/S80 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 S	✓	✓*
	H130 S	✓*	
Compactors (Vibratory Plate)	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

326 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match ☐ No Match

TRS23 (HCS70 TOP/HCS70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 S	✓	✓
	H130 S	✓	
Compactors (Vibratory Plate)	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

TRS23 (HCS70/55 TOP/HCS70/55 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 S	✓	✓
	H130 S	✓	
Compactors (Vibratory Plate)	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

TRS23 (HCS80 TOP/HCS80 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Stick Length		R2.95 (9'8")	R3.6 (11'10")
Hydraulic Hammers	H120 S	✓	
Compactors (Vibratory Plate)	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

BOOM-MOUNT ATTACHMENTS

Counterweight		4600 kg (10,140 lb)	
Boom Type		Reach	
Mobile Scrap and Demolition Shears	S2050	✓	
	S3050 Flat Top	✓	

326 Hydraulic Excavator Specifications

Thumb Specifications



Thumb Available



Not Available

Bucket Type	Tooth Quantity	Width		Pro Plus		Pro		Stiff Link		Utility	
		mm	in	Pin-on	Cat Pin Grabber	Pin-on	Cat Pin Grabber	Pin-on	Cat Pin Grabber	Pin-on	Cat Pin Grabber
General Duty	5	902	36	✓	✓	✓	✓	✓	✓	✓	✓
	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	6	1208	48	✓	✓	✓	✓	✓	✓	✓	✓
	7	1350	54	✓	✓	✓	✓	✓		✓	✓
Heavy Duty	4	902	36	✓	✓	✓	✓	✓	✓	✓	✓
	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	5	1208	48	✓	✓	✓	✓	✓	✓	✓	✓
	6	1350	54	✓	✓	✓	✓	✓	✓	✓	✓
	7	1500	60	✓	✓	✓	✓	✓	✓	✓	✓
	7	1650	66	✓	✓	✓	✓	✓	✓	✓	✓
Heavy Duty Power	5	1080	42		✓			✓	✓	✓	✓
	5	1232	48	✓	✓	✓	✓	✓	✓	✓	✓
	6	1384	54					✓	✓	✓	✓
Severe Duty	4	902	36	✓	✓	✓	✓	✓	✓	✓	✓
	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	5	1208	48	✓	✓	✓	✓	✓	✓	✓	✓
Pin Grabber Performance (HD)	5	1208	48		✓		✓			✓	✓
	6	1350	54							✓	✓
	7	1500	60							✓	✓
Pin Grabber Performance (SD)	4	902	36							✓	✓
	5	1056	42		✓					✓	✓

326 Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOMS, STICKS AND LINKAGES			CAB (continued)		
5.9 m (19'4") Reach boom		✓	Roof sunscreen	✓	
10.2 m (33'6") Super Long Reach boom		✓	Roller front sunscreen	✓	
2.95 m (9'8") Reach stick		✓	Roller rear sunscreen		✓
3.6 m (11'10") Reach stick		✓	Washable floor mat	✓	
7.85 m (25'9") Super Long Reach stick		✓	Beacon ready	✓	
Bucket linkage, CB1 type with lifting eye		✓	Cat Stick Steer		✓
Bucket linkage, A type with lifting eye for Super Long Reach		✓	Auxiliary relay		✓
Bucket linkage, A type with lifting eye for Super Long Reach, Cat Grade		✓	Bluetooth secure start/Attachment locator reader	✓	
CAB			CAT TECHNOLOGY		
ROPS	✓		VisionLink®	✓ ¹	
High-resolution 254 mm (10") LCD touchscreen monitor	✓		VisionLink Productivity		✓
Auto bi-level air conditioner	✓		Remote Flash	✓	
Jog dial and shortcut keys for monitor control	✓		Remote Troubleshoot	✓	
Keyless push-to-start engine control	✓		Cat Grade Connectivity		✓
Height-adjustable console	✓		Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓	
Tilt-up left-side console	✓		Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓	
Heated air-suspension seat	✓		Cat Grade 2D ²	✓	
Joysticks with thumb roller		✓	Cat Grade 2D with Attachment Ready Option (ARO)		✓
51 mm (2") seat belt	✓		Cat Grade 3D single GNSS		✓
Monitor integrated Bluetooth® radio with USB/Auxiliary ports	✓		Cat Grade 3D dual GNSS		✓
12V DC outlets	✓		Laser catcher		✓
Document storage	✓		Cat Assist ² :	✓	
Overhead storage and rear storage with nets	✓		– Boom Assist		
Beverage holder	✓		– Bucket Assist		
Cup holder	✓		– Swing Assist		
Openable two-piece front window	✓		– Grade Assist		
Rear window emergency exit	✓		– Lift Assist		
Radial wiper with washer	✓		Cat Payload ² :	✓	
Openable polycarbonate skylight hatch	✓		– Static weigh		
LED dome light	✓		– Semiautomatic calibration		
Floor welcome light	✓		– Payload/cycle information		
			– USB reporting capability		
			Work tool recognition (PL161)	✓	
			Work tool tracking (PL161)	✓	
			Cat Tilt Rotator (TRS) Integration		✓
			Operator Coaching		✓

¹Connect subscription only. Additional subscriptions are available. Contact your Cat dealer for availability.

²Optional on machines equipped with a Super Long Reach configuration.

(continued on next page)

Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
ELECTRICAL SYSTEM			SAFETY AND SECURITY		
Maintenance-free 1,000 CCA batteries	✓		Cat Command (remote control)		✓
Centralized electrical disconnect switch	✓		Cat 2D E-Fence ² :	✓	
Programmable time-delay working lights	✓		– E-ceiling		
LED chassis, boom and cab lights	✓		– E-floor		
Premium surround lighting package		✓	– E-swing		
ENGINE			– E-wall		
Cat® C7.1 single turbo diesel engine	✓		– E-cab avoidance		
Three selectable modes: Power, Smart, Eco	✓		Auto hammer stop	✓	
4500 m (14,760 ft) altitude capability with engine power derate above 3000 m (9,840 ft)	✓		Rear and right-hand-sideview cameras		✓
Electric cooling fans with auto-reverse function	✓		Cab mirror for right-hand-side track edge		✓
Auto engine speed control	✓		360° visibility		✓
Auto engine idle shutdown	✓		Bluetooth receiver	✓	
Electric fuel priming pump	✓		Ground-level engine shutoff switch	✓	
52° C (125° F) high-ambient cooling capacity	✓		Right-hand handrail and hand hold	✓	
–18° C (0° F) cold start capability		✓	Lockable disconnect switch	✓	
–32° C (–25° F) cold start capability		✓	Signaling/warning horn	✓	
Double element air filter with integrated pre-cleaner	✓		Swing alarm		✓
2 × 115 Amp dual alternator	✓		Service platform with anti-skid plate and countersunk bolts	✓	
Two-stage fuel filtration system with water separator and indicator	✓		Hydraulic lock out lever neutralizes all controls	✓	
HYDRAULIC SYSTEM			Travel alarm	✓	
Electronic main control valve	✓		Inspection lighting		✓
Auto dig boost ³	✓		SERVICE AND MAINTENANCE		
Auto heavy lift ³	✓		Side entry to service platform	✓	
Stick regeneration circuit	✓		Grouped location of engine oil and fuel filters	✓	
Boom regeneration circuit	✓		Scheduled Oil Sampling (S-O-S SM) ports	✓	
Tandem type electronic main pump	✓		Ground-level and platform-level dipstick for engine oil	✓	
Auxiliary pump		✓	Integrated vehicle health management system	✓	
Auto warm up	✓		UNDERCARRIAGE AND STRUCTURES		
Two-speed travel	✓		Two-piece segmented track guiding guards		✓
Hydraulic efficiency monitoring		✓	Full length track guiding guards		✓
Boom and stick drift reduction valve	✓		Swivel guard	✓	
Element type main hydraulic filter	✓		HD travel motor guards	✓	
			HD bottom guards	✓	
			Center upper cover	✓	
			Grease lubricated track	✓	
			4600 kg (10,140 lb) counterweight	✓	
			7400 kg (16,310 lb) counterweight for Super Long Reach		✓
			600 mm (24") single grouser track shoes		✓
			700 mm (28") triple grouser track shoes		✓
			790 mm (31") triple grouser track shoes	✓	
			Tie-down points	✓	

²Optional on machines equipped with a Super Long Reach configuration.

³Not available on machines equipped with a Super Long Reach configuration.

326 Dealer Installed Kits and Attachments

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Lower radial wiper
- Rain protector plus cab light cover
- Laminated P5A glass front windshield
- LH/RH electrical pedal for tool control
- Armrest kit
- Seat with 4-point seatbelt capability
- Dual exit rear window kit
- 75 mm (3") retractable seat belt

SAFETY AND SECURITY

- Cat Detect – People Detection
- Cat Command – Remote control kit

GUARDS

- HD swivel guard 16 mm (0.63") thick
- Side rubber bumper guard
- Operator Protective Guards (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Mesh guard lower half front
- Cab vandalism guard

ELECTRICAL

- Wiring group (jump start)

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

Engine

- The Cat® C7.1 engine meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
 - Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels
- Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.
- *Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).*
- **Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.85 kg (1.9 lb) of refrigerant which has a CO₂ equivalent of 1.216 metric tonnes (1.340 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound Performance

ISO 6395:2008 (external) – 103 dB(A)

ISO 6396:2008 (inside cab) – 70 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Advanced hydraulic systems balance power and efficiency
 - Smart mode matches machine power to digging requirements automatically
 - Eco mode minimizes fuel consumption for light applications
 - Increase operating efficiency up to 45% with standard Cat technologies
 - Cut maintenance costs with extended service intervals
 - Programmable high-efficiency cooling fans run only when needed
 - The latest hydraulic oil filter provides longer life with a 3,000-hour replacement interval

Recycling

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage
Steel	84.28%
Iron	4.95%
Nonferrous Metal	2.37%
Mixed Metal	1.45%
Mixed-Metal and Nonmetal	0.94%
Plastic	1.19%
Rubber	0.17%
Mixed Nonmetallic	0.21%
Fluid	2.94%
Other	1.50%
Uncategorized	0.00%
Total	100%

- A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714:2008 (Earthmoving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714:2008 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following value in the table may vary.

Recyclability – 97%

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2023 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ2557-05 (09-2023)
Replaces AEXQ2557-04
Build Number: 07F
(N Am)



MUSTANG CAT		New Machine Sales Agreement		MUSTANG CAT RENTALS	
REF# Q-46214		MUSTANG MACHINERY COMPANY, LLC. D/B/A MUSTANG CAT, 12800 NORTHWEST FREEWAY, HOUSTON TX 77040 PHONE: (800) 256 - 1001			
SOLD TO	CUSTOMER	City Of League City	SHIP TO		
	STREET ADDRESS	Attn Accts Payable 300 W Walker			
	CITY/STATE	League City/TX		/	
	POSTAL CODE	77573			
	COUNTY/ COUNTRY				
	PHONE NUMBER	2815541089			
	EMAIL	david.tickle@leaguecitytx.gov			
	CUSTOMER CONTACT	EQUIPMENT David Tickle		F.O.B. AT:	
		PRODUCT			
		SUPPORT			
	INDUSTRY CODE			SHIP VIA:	
	PRINCIPAL WORK CODE				
CUSTOMER NUMBER: 0299620		SALES TAX EXEMPTION NUMBER (IF APPLICABLE):		CUSTOMER PO NUMBER:	
DESCRIPTION OF EQUIPMENT ORDERED / PURCHASED					
MAKE: Caterpillar		MODEL: 326-07LR		YEAR: 2026	
ID NUMBER: 25NE4848		SERIAL NUMBER: 0FAY30414		SMU: 3	
326	326-07LR				
25NE4848	25NE4848				\$276,670.00
LANE 3 ORDER NC	0P-9003				\$0.00
COUNTERWEIGHT, 16,310LBS	598-9150				\$1,660.00
TRACK, 790MM TG (31")	527-5575				\$4,710.00
GUARD, TRACK GUIDING SEGMENTED	346-7149				\$1,820.00
BOOM, SUPER LONG REACH	527-2206				\$23,180.00
STICK, SUPER LONG REACH	620-3128				\$14,180.00
LINKAGE, BKT-A W/EYE	521-2393				\$2,945.00
CYLINDER, BOOM	527-1854				\$7,470.00
CYLINDER, STICK SLR	216-6605				\$5,250.00
CYLINDER, BKT SLR	418-9085				\$2,435.00
BOOM TUBE, SLR	578-1158				\$0.00
FIXTURE, BOOM CYLINDER	565-5813				\$0.00
BKTA DC 48" 074YD3 A 852	441-6077				\$5,931.00
HYDRAULIC PKG, COMB ADV	597-3160				\$10,850.00
CIRCUIT, 2 WAY MEDIUM	601-7880				\$4,260.00
LINES, DRAIN, STD	516-7670				\$0.00
LINES, MP, SLR BOOM	613-7627				\$1,595.00
LINES, MP, SLR STICK	613-7628				\$1,100.00
LINES, A/C	577-7867				\$0.00
JOYSTICKS, VERTICAL SLIDER 0	528-6835				\$1,450.00
SUN SCREEN, REAR	488-6450				\$254.00
CAMERA, REAR + RH VIEW 0	593-4954				\$915.00
LIGHTS, CAB, W/O 360 0	577-3853				\$370.00
LIGHT, REACH & SLR BOOM LH	577-6541				\$183.00
LIGHT, REACH & SLR BOOM RH	577-6542				\$183.00
MIRROR, CAB, W/O GUARD	580-8628				\$130.00
PROD LINK, PLE643/PLE743 RADIO 0 NC	594-9052				\$0.00
NETWORK MANAGER, STD	555-7286				\$0.00
JOYSTICK STEER + AUX RELAY PKG	617-0334				\$1,250.00
BATTERIES, 2 0	506-5013				\$695.00
PLUG, HIGH PRESSURE LINES	564-9727				\$0.00
FILM, EMC	528-4738				\$0.00
FILM, INTERIOR, ANSI	573-4351				\$0.00
FILM, EXTERIOR, ANSI	578-2910				\$0.00
FILM, ROPS	610-6129				\$0.00
FILM, STICK WARNING, ANSI 0 NC	567-3815				\$0.00
SERIALIZED TECHNICAL MEDIA KIT 0 NC	421-8926				\$0.00
STORAGE PROTECTION (EXPORT) 0	0P-7563				\$28.00
STORAGE PROTECTION (EXPORT) 0	0G-4126				\$79.00
PACKING, SLR W/ BKT	0P-8491				\$660.00
TILTING SPRING LOADED MANUAL COUPLER	WERK-BRAU				\$16,330.13
HP LINES KIT FOR 60' SLR EXCAVATOR	HKX				\$20,766.67
60" EXCAVATOR ROTARY MOWER - INCLUDES MOUNTING BRACKET & PINS	DIAMOND-MOWERS				\$21,881.94

Total Machine List Price: \$429,231.74	
Dealer Discount: \$75,863.82	
Non-Discounted Items:	
Make Ready	\$10,000.00
Freight Charges	\$3,200.00
Warranty	\$3,009.00
Miscellaneous	\$0.00
Quote Notes	
Sourcewell Contract #011723-CAT. COI.	

TRADE-IN EQUIPMENT			TERMS OF SALE	
MODEL: _____	YEAR: _____	SERIAL NUMBER: _____	SUB TOTAL	\$369,576.92
PAYOUT TO: _____	AMOUNT: \$0.00	PAID BY: _____	HEAVY EQUIPMENT TAX	\$0.00
MODEL: _____	YEAR: _____	SERIAL NUMBER: _____	SALES TAX	\$0.00
PAYOUT TO: _____	AMOUNT: _____	PAID BY: _____	DOC FEE	\$0.00
MODEL: _____	YEAR: _____	SERIAL NUMBER: _____	DIESEL SURCHARGE	\$0.00
PAYOUT TO: _____	AMOUNT: _____	PAID BY: _____	TOTAL CASH PRICE	\$369,576.92
ALL TRADE-INS ARE SUBJECT TO EQUIPMENT BEING IN "AS INSPECTED CONDITION" BY MUSTANG CAT AT TIME OF DELIVERY. CUSTOMER HEREBY STATES THE ABOVE LISTED EQUIPMENT EMISSIONS HAVE NOT BEEN ALTERED OR CHANGED. CUSTOMER HEREBY SELLS THE TRADE-IN EQUIPMENT DESCRIBED ABOVE TO MUSTANG CAT AND WARRANTS IT TO BE FREE AND CLEAR OF ALL CLAIMS, LIENS, MORTGAGES AND SECURITY INTEREST EXCEPT AS SHOWN ABOVE. CUSTOMER VALUE AGREEMENT CUSTOMER VALUE AGREEMENT - (CVA W/O LABOR) - Included with Purchase For the duration of the CVA term - 500 Hours / 1 Year, whichever occurs first, based on invoice date; customer receives: • Parts Kit for Planned Maintenance • Visionlink Connect Subscription • Maintenance Alerts / Order Links • Guaranteed availability on eligible parts • Service Updates via Cat Interact • Scheduled Oil Sample Kits (SOS)			CASH WITH ORDER	\$0.00
			TRADE IN ALLOWANCE	\$0.00
			TOTAL DOWN PMT. & TRADE IN ALLOWANCE	-
			UNPAID BALANCE OF TRADES	\$0.00
			Invoice – Downpayment + Trade in Allowance	\$369,576.92
			TOTAL AMOUNT TO BE FINANCED	\$369,576.92
EQUIPMENT WARRANTY				
Customer acknowledges that he has received a copy of the manufacturer's warranty and has read and understood said warranty. All used equipment is sold as is where is and no warranty is offered or implied except as specified herein.				

WARRANTY TERM	60 Month 3000 Hours Powertrain + Hydraulics + Tech Parts & Labor CAT Work Tools Warranty 12 Months/Unlimited Hours	CUSTOMER INITIAL.
---------------	---	-------------------

IT IS MUSTANG CAT's INTENT THAT THIS AGREEMENT REFLECTS THE FULL AND FINAL TERMS OF THIS TRANSACTION. HOWEVER, DUE TO CHANGING CIRCUMSTANCES, MUSTANG CAT MAY NOT BE ABLE TO HONOR THE EXACT PRICING OR DELIVERY DATES HEREIN. EXAMPLES OF THOSE CIRCUMSTANCES INCLUDE, BUT ARE NOT LIMITED TO, LIMITED PRODUCT AVAILABILITY, EXTENDED LEAD TIMES, AND SUPPLIER PRICING CHANGES. CUSTOMER ACCEPTS AND ACKNOWLEDGES THAT IF MUSTANG CAT IS NOT ABLE TO HONOR THE TERMS OF THIS AGREEMENT, THIS AGREEMENT WILL BE VOIDED, AND BOTH PARTIES RELEASED FROM THIS AGREEMENT'S BINDING EFFECT. VOIDING OF THIS AGREEMENT DOES NOT PREVENT THE PARTIES FROM ENTERING INTO A NEW AGREEMENT, NOR IMPACT OTHER AGREEMENTS AMONG THE PARTIES HERETO.

DISCLAIMER OF WARRANTIES AND WAIVER OF CLAIMS

MUSTANG CAT IS NOT A MANUFACTURER OF THE EQUIPMENT. ALTHOUGH MUSTANG CAT MAY ADMINISTER WARRANTIES ISSUED BY THE MANUFACTURER, CUSTOMER ACKNOWLEDGES AND AGREES THAT: (1) ANY EXPRESS WARRANTIES BY THE MANUFACTURER FOR THE EQUIPMENT ARE NOT THE RESPONSIBILITY OF MUSTANG CAT; AND (2) THE MANUFACTURER'S WARRANTY CONTAINS LIMITATIONS AND CUSTOMER MAY INCUR CERTAIN REPAIR, TRANSPORTATION, OR OTHER CHARGES BY MUSTANG CAT WHICH ARE NOT COVERED BY THE MANUFACTURER'S WARRANTY. ANY AND ALL IMPLIED WARRANTIES ARE EXCLUDED.

MUSTANG CAT, BY VIRTUE OF HAVING SOLD THE EQUIPMENT UNDER THIS AGREEMENT, HAS NOT MADE AND DOES NOT MAKE ANY REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, AS TO CONDITION, COMPLIANCE WITH SPECIFICATIONS OR REGULATIONS, QUALITY, DURABILITY, SUITABILITY, MERCHANTABILITY, FITNESS FOR USE OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY OTHER WARRANTY WHATSOEVER, EXPRESS OR IMPLIED, WITH RESPECT TO THE EQUIPMENT. MUSTANG CAT IS NOT LIABLE FOR ANY DAMAGES (WHETHER ORDINARY, SPECIAL OR PUNITIVE) ARISING FROM ANY FAILURE OF THE EQUIPMENT TO OPERATE OR THE FAULTY OPERATION OF THE EQUIPMENT, OR THE INSTALLATION, OPERATION, REPAIR OR USE OF THE EQUIPMENT.

OTHER TERMS AND CONDITIONS

ADDITIONAL TERMS AND CONDITIONS SET FORTH ON THE REVERSE SIDE HEREOF OR ATTACHED HERETO (AS APPLICABLE) CONSTITUTE AN IMPORTANT PART OF THIS AGREEMENT AND ARE INCORPORATED HEREIN VERBATIM FOR ALL PURPOSES. PLEASE REVIEW SUCH OTHER TERMS AND CONDITIONS BEFORE SIGNING THIS AGREEMENT.

THESE TERMS AND CONDITIONS SUPERSEDE ALL OTHER TERMS AND CONDITIONS PRESENTED BY OR TO CUSTOMER UNLESS PROVIDED IN A DOCUMENT SIGNED BY AN AUTHORIZED REPRESENTATIVE OF BOTH PARTIES AND CONTAINING REFERENCE TO THIS SALES ORDER AGREEMENT.

THIS AGREEMENT IS SUBJECT TO THE TERMS AND CONDITIONS ATTACHED

DATE _____
ORDER
RECEIVED
BY _____ Stuart Newton
SIGNATURE _____
TITLE _____ Governmental Sales
Representative

DATE _____
CUSTOMER NAME _____
CUSTOMER SIGNATURE _____
TITLE _____

TERMS AND CONDITIONS

1. DEFINITION OF MUSTANG: MUSTANG and Seller are defined as Mustang Machinery Company, LLC. d/b/a MUSTANG CAT, Mustang Rental Services of Texas, LLC. d/b/a MUSTANG RENTAL SERVICES, and their subsidiaries, affiliates and related entities.

2. AGREEMENT: This Agreement becomes binding on MUSTANG CAT only upon MUSTANG CAT's execution of this Agreement, and subject to the availability of the equipment from the manufacturer. Customer shall inspect the equipment immediately upon its receipt, and shall be conclusively deemed to have accepted the equipment in good and operating condition unless the customer promptly notifies MUSTANG CAT of any defects, in writing and via telephone. MUSTANG CAT shall have the right, at its option, to either repair or replace the equipment, or terminate this Agreement, in which event the equipment shall be returned to MUSTANG CAT. Delays in delivery shall be excused if caused by any cause beyond the reasonable control of MUSTANG CAT.

3. TITLE TO EQUIPMENT: Title to the equipment shall pass to the customer only upon MUSTANG CAT's actual receipt of funds in the total amount of the Purchase Price and other sums due to MUSTANG CAT hereunder.

4. TAKEN IN TRADE: Customer does hereby irrevocably sell, assign, transfer and convey possession, ownership and title unto MUSTANG CAT to the Trade-in Equipment described above. Customer warrants that it is the sole owner of the Trade-in Equipment, has full power and authority to sell the Trade-in Equipment, and that there is no lien or any encumbrance of any kind or nature against the Trade-in Equipment, of record or otherwise.

5. TAXES: Customer shall promptly pay all taxes, fees, transportation and other costs, assessments and all governmental charges of any kind or character, and any penalties, fines or interest thereon relating to the equipment.

6. CUSTOMER'S WARRANTIES AND USE: In addition to the other warranties contained herein, customer warrants that (i) if customer is an entity, it is duly organized and validly existing in good standing, and (ii) is duly authorized to execute, deliver, and perform under this Agreement. Customer further agrees and warrants, at its cost, that: (1) the equipment shall at all times be used solely for customer's business and not for personal, family, or household use, and in accordance with the use, and/or instructional materials, solely for the purpose for which it was intended; (2) only customer's employees (who must be skilled, trained and certified to do so) shall use the equipment. Customer hereby further agrees and warrants that (i) any payments made pursuant to this Agreement are intended by the customer to be a contemporaneous exchange for new value given to customer and it is a substantially contemporaneous exchange and (ii) each payment made of a debt incurred by customer under this Agreement is in the ordinary course of business or financial affairs of customer and MUSTANG CAT, and such payment was made in the ordinary course of business or financial affairs of customer and MUSTANG CAT, or made according to ordinary business terms.

7. SOLE AND EXCLUSIVE REMEDY: Customer further agrees that his SOLE AND EXCLUSIVE remedy, if any, against MUSTANG CAT, shall be as contained in any express, written warranty applicable hereto. Customer acknowledges that he has received, read, understands and accepts the terms contained herein. The customer agrees that no other remedy (including, but not limited to, claims for INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, OR ANY CAUSE, LOSS, ACTION, CLAIM OR DAMAGE WHATSOEVER OR INJURY TO PERSON OR PROPERTY OR ANY OTHER CONSEQUENTIAL, ECONOMIC OR INCIDENTAL LOSS) shall be available to him.

8. LOSS AND DAMAGE: Customer assumes all liability and risk of, and shall be solely responsible for, all damage and loss to the equipment from any cause whatsoever, whether or not such loss or damage is or could have been covered by insurance. Until the equipment is paid in full, Customer shall promptly give MUSTANG CAT written notice of any loss or damage and reimburse MUSTANG CAT for the value of the equipment if damaged or stolen. MUSTANG CAT's sole responsibility for shipments shall be to deliver the equipment to a public carrier company.

9. SECURITY AGREEMENT: Unless the product(s) is paid for in full in cash at the time of delivery, MUSTANG CAT retains and customer hereby grants to MUSTANG CAT a security interest in such product(s) within the meaning of the Uniform Commercial Code together with all and any substitutions, additions, or accessions to such product(s), and in any and all proceeds from the sale, exchange or disposal thereof to secure payment of the purchase price of such product(s). Customer, prior to or after delivery, specifically agrees to enter into and execute a financing statement, or statements, and an additional security agreement setting forth the terms and conditions of the Agreement between the parties in relation to the security interest of MUSTANG CAT. Customer further appoints MUSTANG CAT as its attorney-in-fact to execute any such financing statement or security agreement in the place and stead of customer. In the event customer fails to execute any such financing statement or security agreement upon request by MUSTANG CAT, the entire balance of the purchase price shall be at MUSTANG CAT's option become due and payable and customer shall execute any notes or other evidences of indebtedness that may be required by MUSTANG CAT. However, any note taken herewith shall be evidence of customer's obligation to pay the unpaid time balance only and is not to be considered or construed to be payment for the product(s).

10. EVENTS OF DEFAULT: The following are events of default by Customer: (1) failure to pay any amount due hereunder or otherwise; (2) Customer's ceasing to do business, becoming insolvent, taking advantage of any law for the relief of debtors or filing bankruptcy, making an assignment for the benefit of creditors; (3) when MUSTANG CAT deems itself insecure with respect to customer's performance; (4) Customer fails to perform any of customer's other obligation hereunder or otherwise; (5) Customer's representation or warranty is false or misleading.

11. REMEDIES ON DEFAULT: In the event of any default by customer, MUSTANG CAT is entitled to any one or more of the following remedies, without any notice of default: (a) take possession of the equipment or any other equipment, including enter premises where its located; (b) terminate this Agreement; (c) seek specific performance or injunction or recover damages; (d) stop delivery of the equipment or any other equipment; (e) surrender any insurance policies and receive the unearned premiums; (f) without terminating this Agreement, MUSTANG CAT may take possession of the equipment and sell, relet or otherwise dispose of the equipment as a secured party under UCC and deduct all expenses, costs, reasonable attorneys fees, and other charges incurred by MUSTANG CAT; (g) recover deficiency from customer; and/or (h) perform by itself, or cause performance of, customer's obligation, at customer's cost. In no event shall MUSTANG CAT be required to sell or relet the equipment, nor required to rebate or pay back any gain or profit as a result of leasing the equipment. MUSTANG CAT's remedies hereunder shall not be exclusive, but shall be cumulative and in addition to all other remedies existing at law or in equity.

12. COLLECTIONS: In the event any action either to collect payment or enforce the terms and provisions of this agreement becomes necessary, CUSTOMER agrees to pay reasonable cost of collection and attorney's fees to MUSTANG CAT should this matter be placed in the hands of a collection agency or an attorney for collection.

13. INDEMNITY: CUSTOMER AGREES TO INDEMNIFY, DEFEND AND HOLD HARMLESS MUSTANG CAT AND MUSTANG CAT'S PARTNERS, EMPLOYEES, AGENTS, REPRESENTATIVES, SUCCESSORS AND ASSIGNS FROM ANY AND ALL CLAIM, EXPENSE, CAUSE OF ACTION, DAMAGE, LIABILITY, COST, PENALTY, TAX, ASSESSMENT, CHARGE, PUNITIVE DAMAGE OR EXPENSE BY REASON OF ANY ACT OR OMISSION OF CUSTOMER OR ITS EMPLOYEES, AGENTS, CONTRACTORS, SUBCONTRACTORS, AFFILIATES OR INVITEES, WHILE THE EQUIPMENT IS IN THE POSSESSION OR UNDER THE CONTROL OF THE CUSTOMER OR ITS AGENTS.

14. INSURANCE COVERAGES: Customer shall maintain Equipment insurance and General Liability insurance, Auto Liability insurance, and Workers Compensation and Employer's Liability Insurance, each with minimum \$1,000,000 per occurrence and shall deliver to MUSTANG CAT a Certificate of Insurance evidencing same. Such insurance obtained by customer shall be primary.

15. NOTICES: All notices hereunder shall be in writing and shall be deemed delivered if delivered personally or mailed, by certified mail, return receipt requested, to the respective addresses of the parties set forth above or any other address designated by written notice. By signing this Agreement, customer represents that it has read and agrees to the Terms and Conditions applicable to communications made by MUSTANG CAT to customer by Text or Email and which are found at <https://www.mustangcat.com/legal-notices/>

16. MISCELLANEOUS: This Agreement may only be modified by a written agreement signed by MUSTANG CAT. If any provision of this Agreement is hereafter held invalid or unenforceable, the remainder of the Agreement shall not be affected and the provisions are declared severable. If there is more than one customer, the obligations of customers hereunder are joint and several. Subject to the terms hereof, this Agreement shall be binding upon and inure to the benefit of MUSTANG CAT and customer and their respective personal representatives, successors and assigns. This Agreement shall be governed by the laws of Texas, each party hereby irrevocably consents to submit to the exclusive jurisdiction of the courts of the state of Texas in Harris County, Texas. I agree and acknowledge that to the extent equipment is equipped with a telematics system (e.g., Product Link), that data concerning such equipment, including condition, and operation are being transmitted to Caterpillar Inc., and its affiliates. The full privacy statement applicable to the transfer of telematics information, including instructions on how to ask questions about telematics and how to revoke your consent, is available at: <https://www.caterpillar.com/en/legal-notices/data-governance-statement.html>. **THE PARTIES HEREBY WAIVE THEIR RIGHT TO A JURY TRIAL OF ANY CLAIM OR CAUSE OF ACTION ARISING OUT OF THIS AGREEMENT OR THE SUBJECT MATTER HEREOF.**

REFERENCES

REFERENCE 1:

Company Name:	Galveston County R&B
Company Address:	5115 State Hwy 3, Dickinson, TX 77539
Contact Name/Title/Phone:	Zach Smith/Road Administrator/281-534-4152
Contact Email:	zachary.smith@co.galveston.tx.us
Contract Award Date:	2/3/26
Contract Completion Date:	5/3/26
Contract Project Name:	Cat 926 Wheel Loader
Brief Description of Services:	Mustang Cat will be furnishing Galveston County with a custom spec'd 926 wheel loader for their operations.

REFERENCE 2:

Company Name:	Harris County Precinct #1
Company Address:	7901 El Rio St., Houston, TX 77054
Contact Name/Title/Phone:	Anthony Charles/Fleet Manager/346-286-1889
Contact Email:	anthony.charles@cp1.hctx.net
Contract Award Date:	1/1/26
Contract Completion Date:	1/16/26
Contract Project Name:	Cat 255 Compact Track Loader
Brief Description of Services:	Mustang Cat furnished Harris County with a 255 CTL for their operations.

REFERENCE 3:

Company Name:	Chambers County R&B
Company Address:	201 Airport Rd., Anahuac, TX 77514
Contact Name/Title/Phone:	David Jensen/Shop Foreman/409-267-2712
Contact Email:	dpjensen@chamberstx.gov
Contract Award Date:	1/14/26
Contract Completion Date:	3/24/26
Contract Project Name:	Cat 140 Motor Grader
Brief Description of Services:	Mustang Cat furnished Chambers County with a custom spec'd 140 motor grader for their operations.

REFERENCE 4:

Company Name:	City of Dayton
Company Address:	520 TX-146, Dayton, TX 77535
Contact Name/Title/Phone:	Murphy Green/Public Works Director/936-258-2642
Contact Email:	mgreen@daytontx.org
Contract Award Date:	2/11/26
Contract Completion Date:	2/23/26
Contract Project Name:	Cat 308 Mini-X
Brief Description of Services:	Mustang Cat furnished the City of Dayton with a 308 Mini-X for their operations.

REFERENCE 5:

Company Name:	City of Humble
Company Address:	102 Granberry, Humble, TX 77338
Contact Name/Title/Phone:	Jarred Thomas/Street Superintendent/281-446-2327
Contact Email:	jthomas@cityofhumble.net
Contract Award Date:	12/18/25
Contract Completion Date:	5/18/26
Contract Project Name:	Cat 420 Backhoe
Brief Description of Services:	Mustang Cat will be furnishing the City of Humble with a custom spec'd 420 Backhoe for their operations.

Texas Public Information Act

Steps to Assert that Information is Confidential or Proprietary

All proposals, data, and information submitted to the City of League City are subject to release under the Texas Public Information Act ("Act") unless exempt from release under the Act. You are not encouraged to submit data and/or information that you consider to be confidential or proprietary unless it is absolutely required to understand and evaluate your submission.

On each page where confidential or proprietary information appears, you must label the confidential or proprietary information. Do not label every page of your submission as confidential as there are pages (such as the certification forms and bid sheet with pricing) that are not confidential. It is recommended that each page that contains either confidential or proprietary information be printed on colored paper (such as yellow or pink paper). At a minimum, the pages where the confidential information appears should be labeled and the information you consider confidential or proprietary clearly marked.

Failure to label the actual pages on which information considered confidential appears will be considered as a waiver of confidential or proprietary rights in the information.

In the event a request for public information is filed with the City which involves your submission, you will be notified by the City of the request so that you have an opportunity to present your reasons for claims of confidentiality to the Texas Attorney General.

In signing this form, I acknowledge that I have read the above and further state (Please check one):

☒ The proposal/bid submitted to the City contains NO confidential information and may be released to the public if required under the Texas Public Information Act.

☐ The proposal/bid submitted contains confidential information which is labeled and which may be found on the following pages: _____

and any information contained on page number not listed above may be released to the public if required under the Texas Public Information Act.

Vendor/Proposer Submitting: Mustang Cat

Signature: Stuart Newton Date: 5/13/26

Print Name: Stuart Newton Print Title: Government Sales Rep

**City of League City
House Bill 89 Verification**

I, Stuart Newton (Person name), the undersigned
representative of (Company or Business name) Mustang Cat

(hereafter referred to as company) being
an adult over the age of eighteen (18) years of age, after being duly sworn by the
undersigned notary, do hereby depose and verify under oath that the company named-
above, under the provisions of Subtitle F, Title 10, Government Code Chapter 2270:

1. Does not boycott Israel currently; and
2. Will not boycott Israel during the term of the contract.

Pursuant to Section 2270.001, Texas Government Code:

1. *"Boycott Israel" means refusing to deal with, terminating business activities with, or otherwise taking any action that is intended to penalize, inflict economic harm on, or limit commercial relations specifically with Israel, or with a person or entity doing business in Israel or in an Israeli-controlled territory, but does not include an action made for ordinary business purposes; and*
2. *"Company" means a for-profit sole proprietorship, organization, association, corporation, partnership, joint venture, limited partnership, limited liability partnership, or any limited liability company, including a wholly owned subsidiary, majority-owned subsidiary, parent company or affiliate of those entities or business associations that exist to make a profit.*

5/13/26
DATE

Stuart Newton
SIGNATURE OF COMPANY REPRESENTATIVE

On this the 13th day of May, 2026, personally appeared
Stuart Newton, the above-named person, who after
by me being duly sworn, did swear and confirm that the above is true and correct.



Kristi Newton
Date 5/13/2026

Form CIQ Requirement

Vendors seeking to work with the City of League City must comply with the requirement to complete and submit [Form CIQ](https://www.ethics.state.tx.us/data/forms/conflict/CIQ.pdf) (<https://www.ethics.state.tx.us/data/forms/conflict/CIQ.pdf>), if applicable.

**Addendum Number One (1)
May 19, 2026**

Bids for: **ITB #26-038 Low Emissions Diesel Excavator**

The following clarifications, amendments, deletions, additions, revision and/or modifications are made as part of the contract documents and change the original documents only in the manner and to the extent hereinafter stated and shall be incorporated in the contract documents.

Provisions of this addendum shall take precedence over requirements of the original contract documents and all **BIDDERS ARE REQUESTED TO ACKNOWLEDGE SAID PROVISIONS IN THEIR SUBMISSION.**

Addendum as follows:

REVISED COST SHEET – ADDITIONAL WORK TOOLS PROVIDED

PROJECT COST PROPOSAL

Description	Item Total
1 HYDRAULIC EXCAVATOR	\$ 353,367.92
2 TCEQ-APPROVED GPS	\$ Included
3 TCEQ-APPROVED GPS INSTALLATION LABOR	\$ Included
4 FRIEGHT	\$ 3,200.00
5 WARRANTY:	\$ 3,009.00
6 LEAD/DELIVERY TIME	60 days
7 Pin Lock Coupler Attachment	\$ 16,330.13 - LIST
8 Ditch Cleaning Bucket	\$ 5,931.00 - LIST
9 Ditch Cleaning Tilt Bucket	\$ ***TILTING COUPLER***
10 Hydraulic Tilt Rotator Attachment	\$ ***TILTING COUPLER***
11 Excavator 60-Inch Tri-Blade Rotary Brush Cutter	\$ 21,881.94 - LIST
TOTAL COST ESTIMATE	\$ 369,576.92

WORK TOOLS PROVIDED

Y X N ___ Pin lock Coupler attachment tilting 90 degrees left and right compatible with long reach boom and all attachments

Y X N ___ Ditch Cleaning Bucket 48 inches wide with a capacity of 0.74 cubic yards straight edge with series of holes in the sides and curve of the bucket to allow water to drain compatible with long reach boom

Y ___ N X Ditch Cleaning Tilt Bucket 48 inches wide with a capacity of 0.63 cubic yards straight edge compatible with long reach boom

Y ___ N X A hydraulic tilt rotator attachment compatible with a 23–32-ton excavator long reach boom that has 360-degree rotation 8 seconds, per 1 full rotation 40 degree left/right tilt angle and compatible with all work tools

Y X N ___ Excavator 60-inch tri blade rotary brush cutter for cutting brush and up to 10-inch diameter trees compatible with long reach boom

**Addendum Number One (1)
May 19, 2026**

QUESTION AND ANSWER DEADLINE EXTENSION

The deadline for submission of questions and requests for clarification regarding this ITB is hereby extended to:

Tuesday, May 26, 2026, at 5:30 PM

A second addendum addressing submitted questions and any additional clarifications will be issued on:

Monday, June 1, 2026, at 5:30 PM

CLARIFICATION REGARDING COMPARABLE EQUIPMENT

The excavator currently in use is substantially similar and comparable to the equipment being specified within this ITB, with only minor differences attributable to the age of the machine. The referenced equipment is not identified as a "326 Excavator" because it is manufactured as a Link-Belt model; however, it is considered equivalent in overall functionality, capability, and intended operational use.

All other terms, conditions, specifications, and requirements of the original ITB shall remain unchanged and in full force and effect.

End of Addendum

If you have any questions, please contact Purchasing Department at purchasing@leaguecitytx.gov.

NOTE: ADDENDA MUST BE ACKNOWLEDGED ON THE BID COVER SHEET.



Tracey Mathews
Senior Purchasing Specialist